
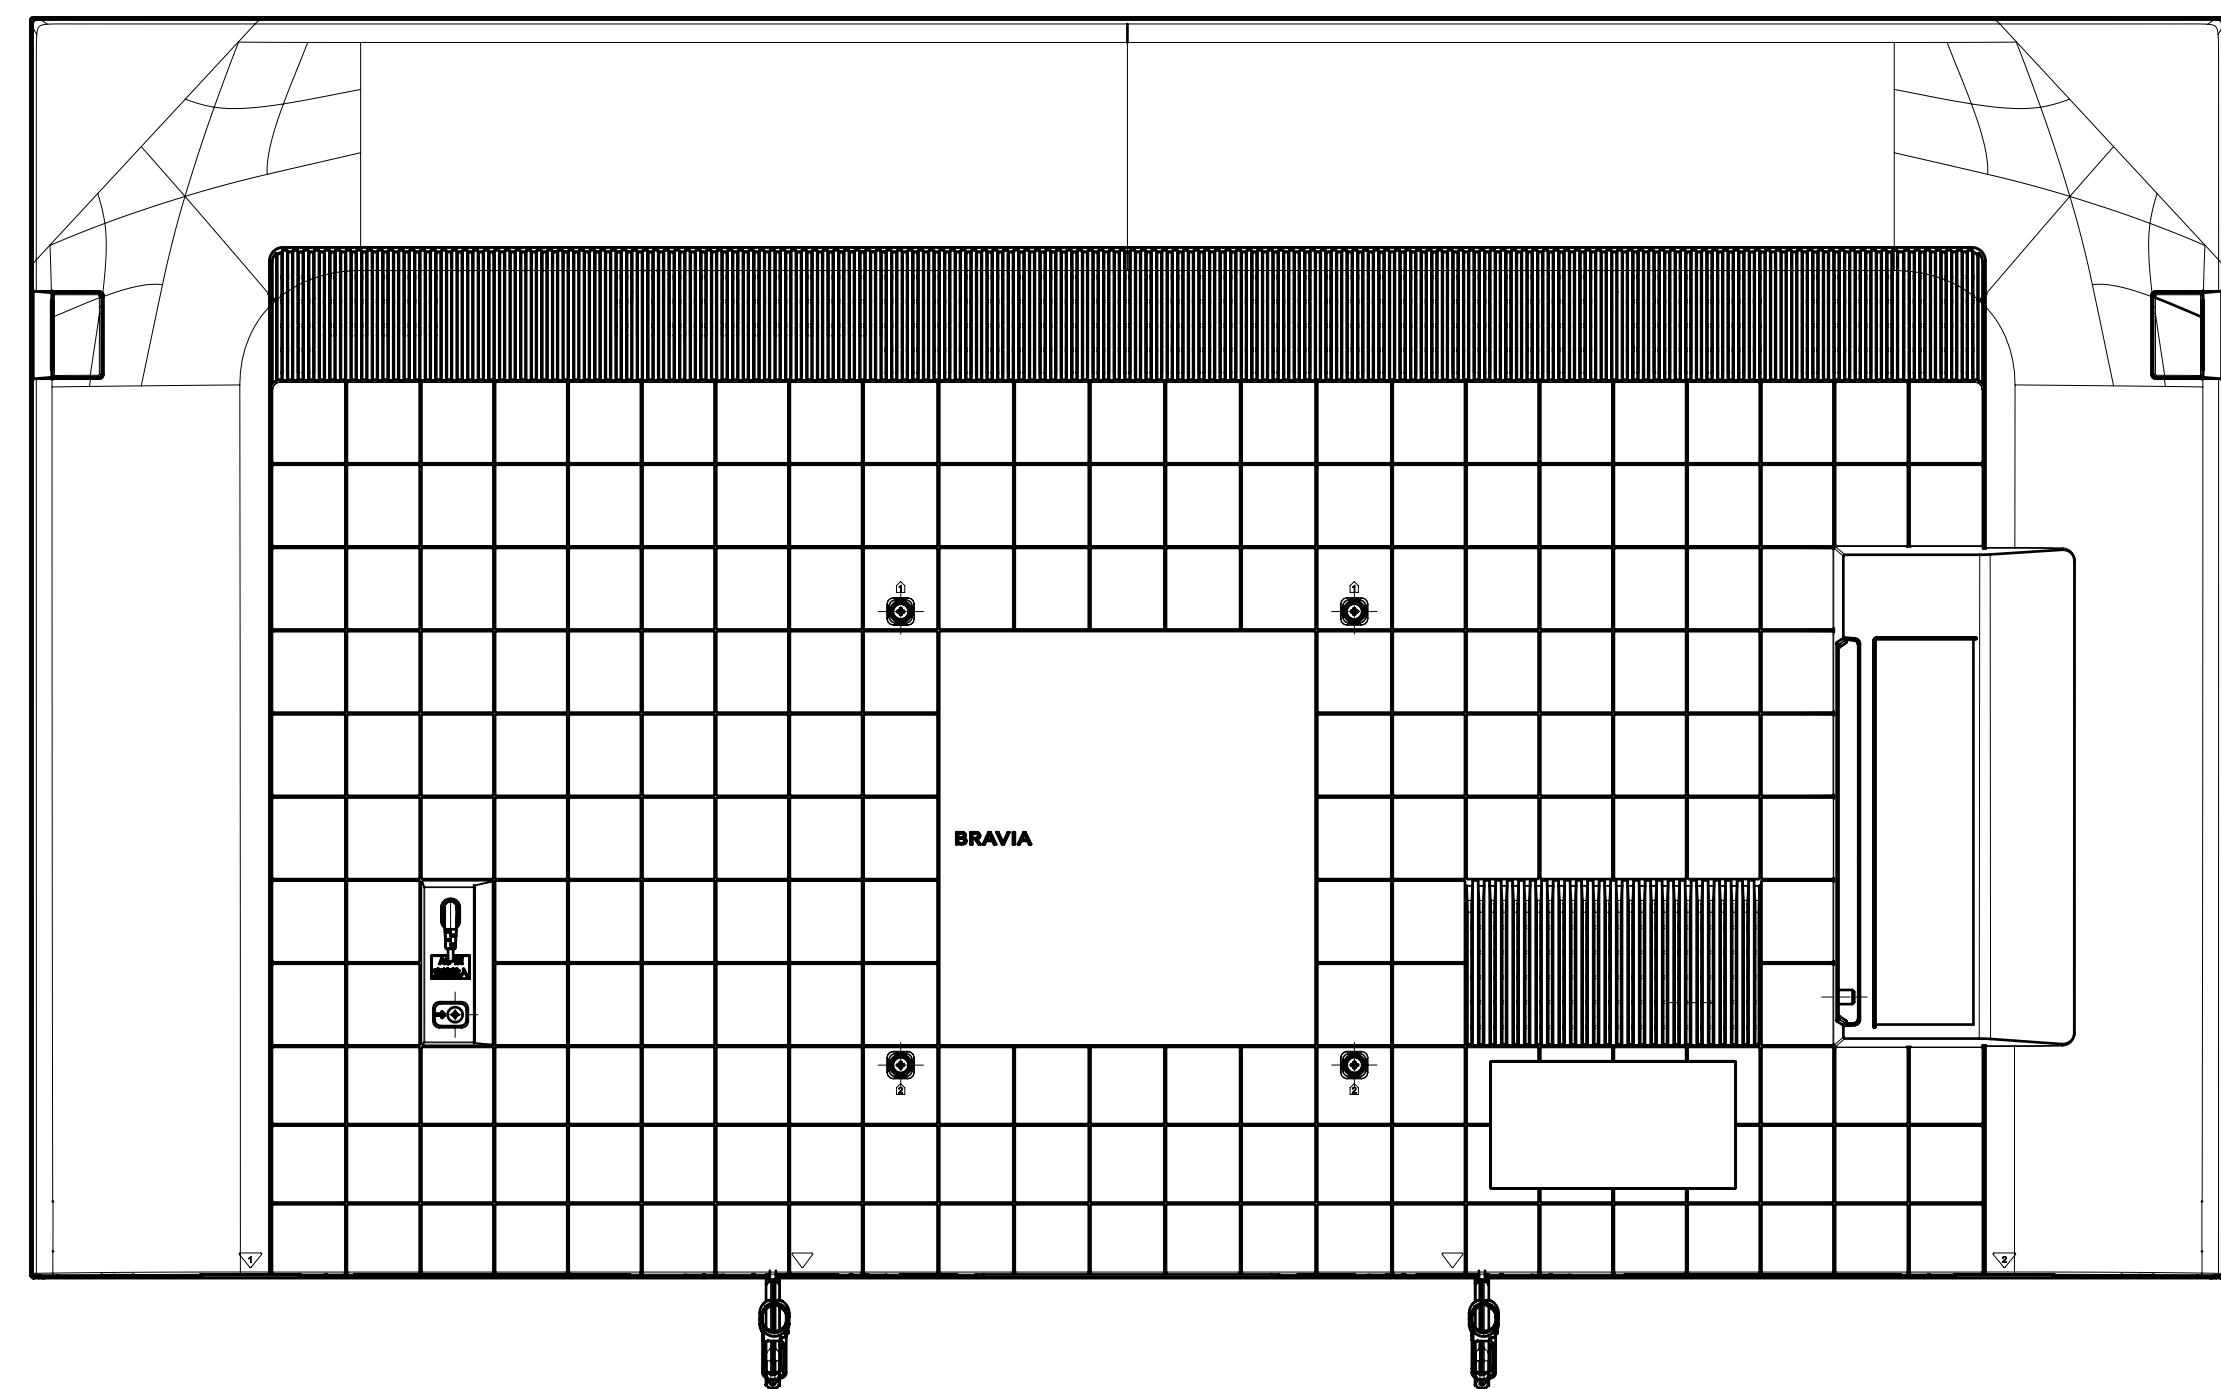
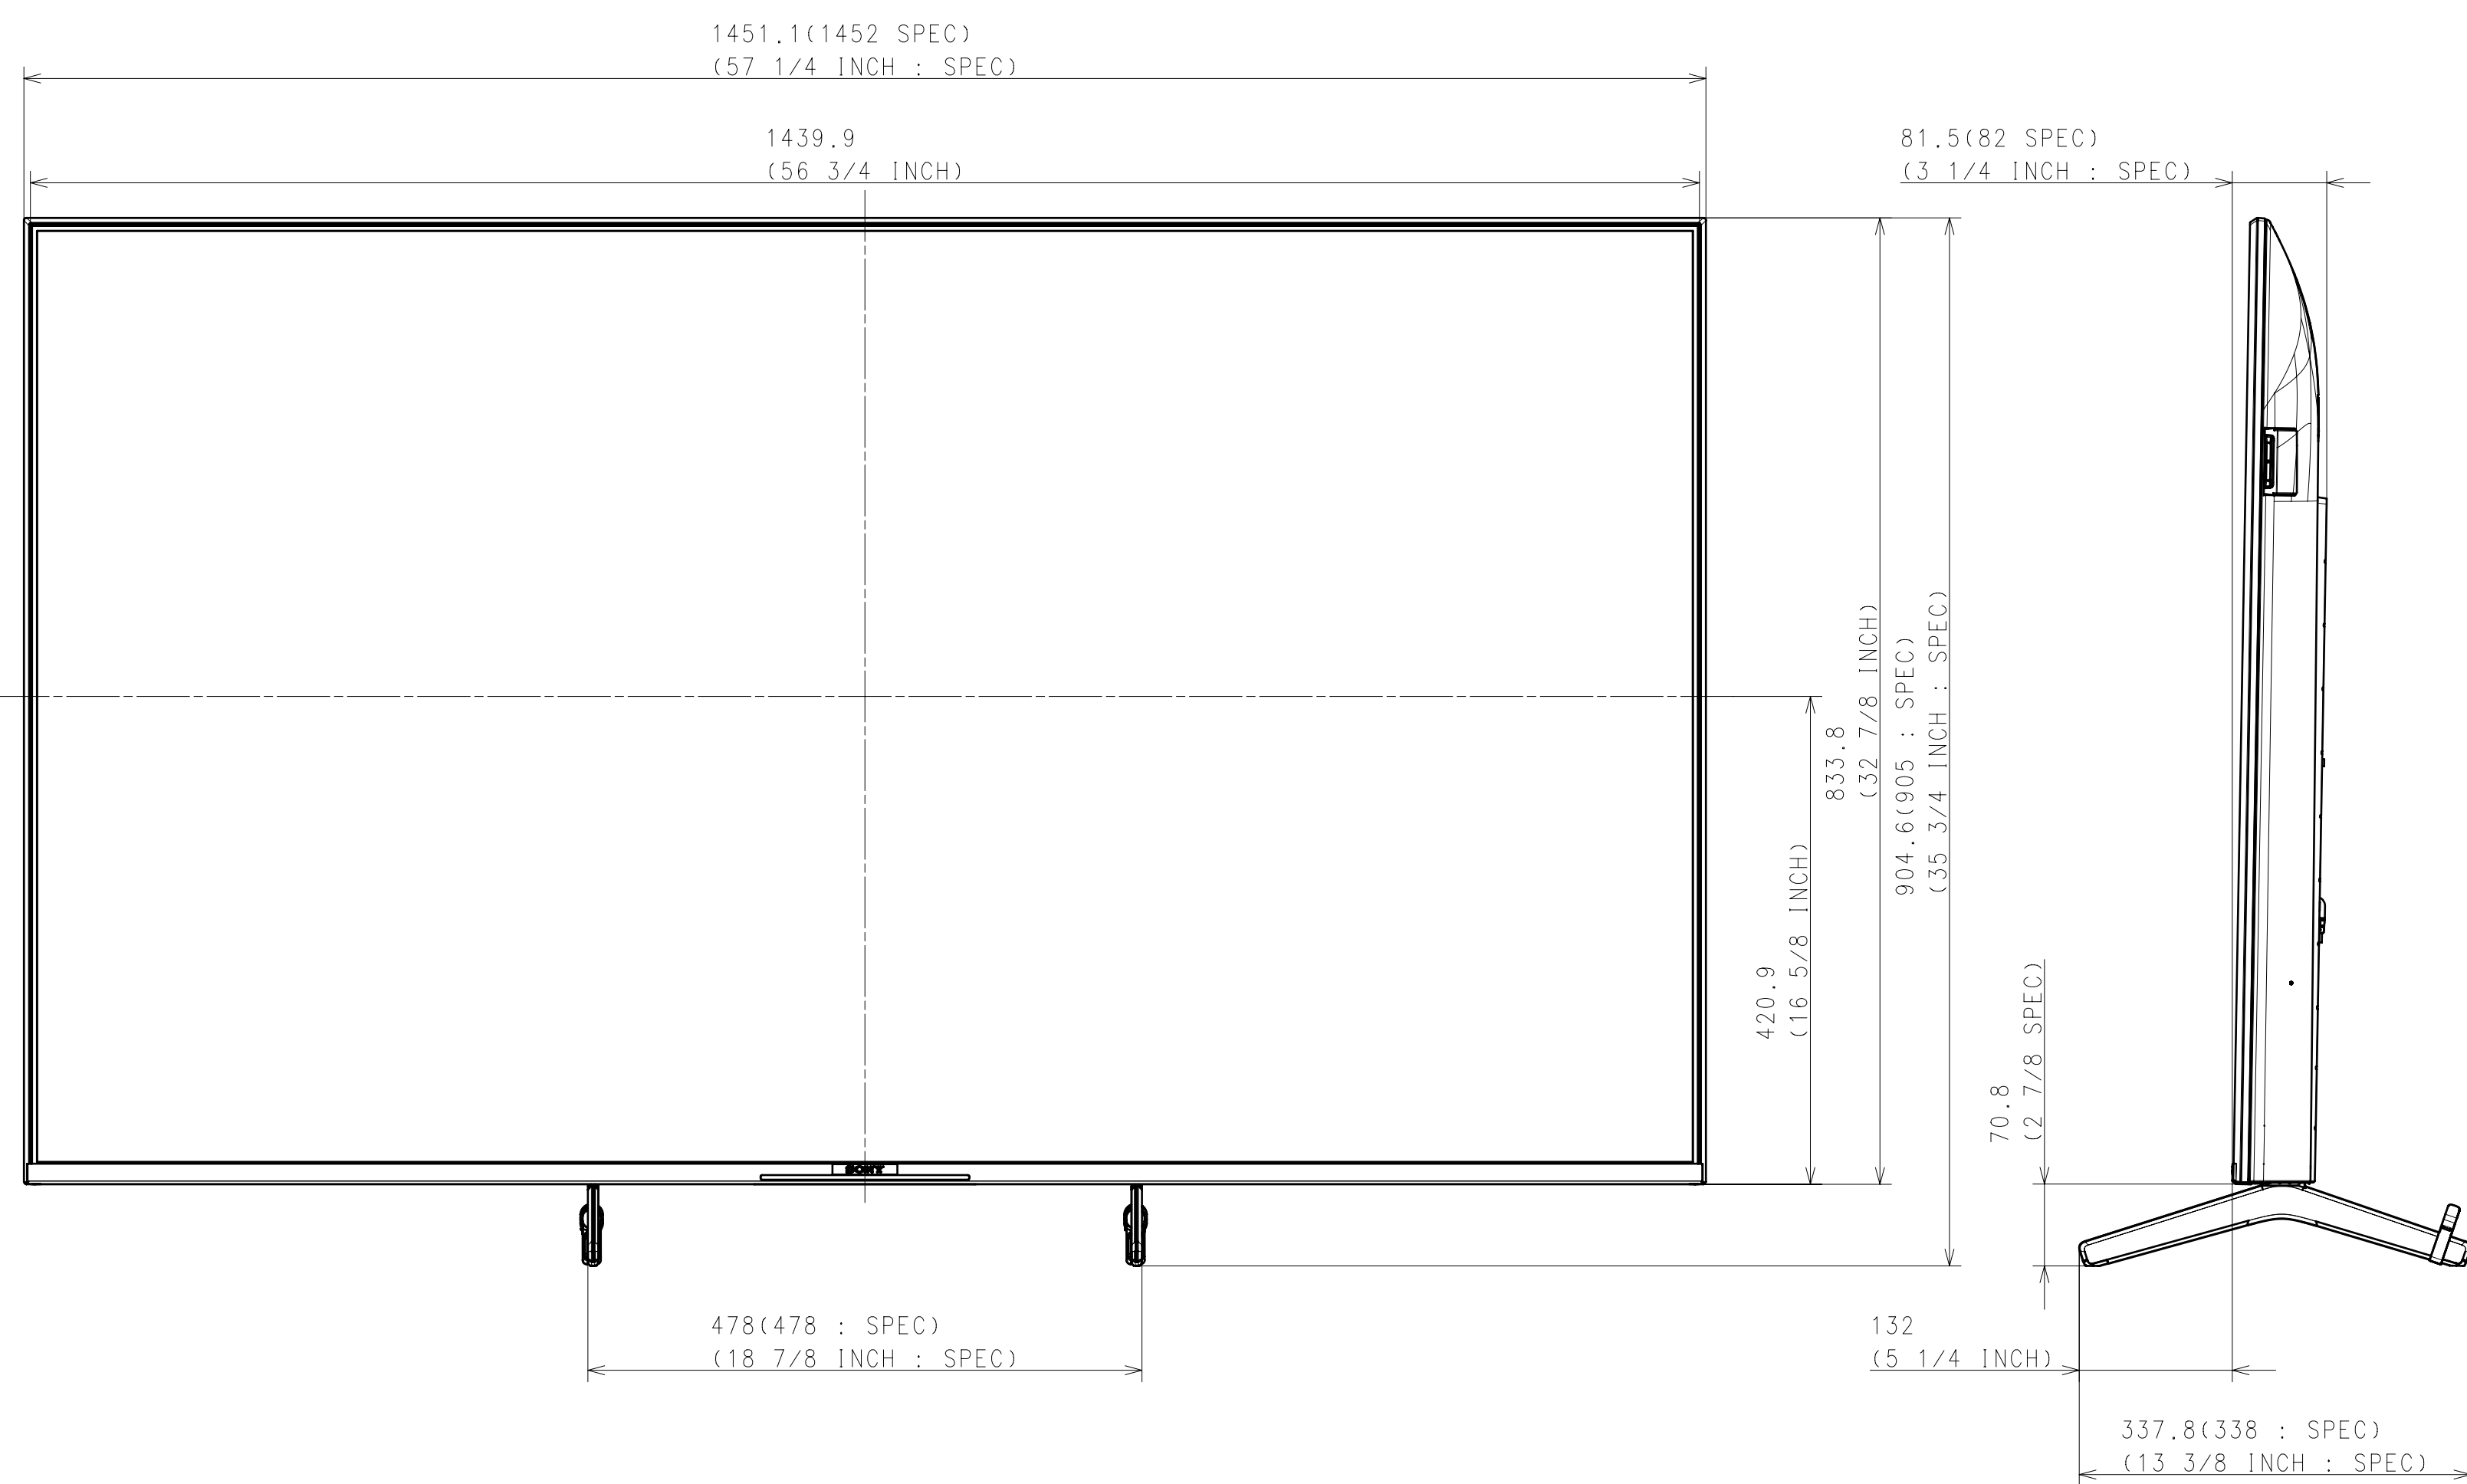





WITH STAND

MAIN STAND (NARROW POSITION)
XR-65X90J (EUROPE) only

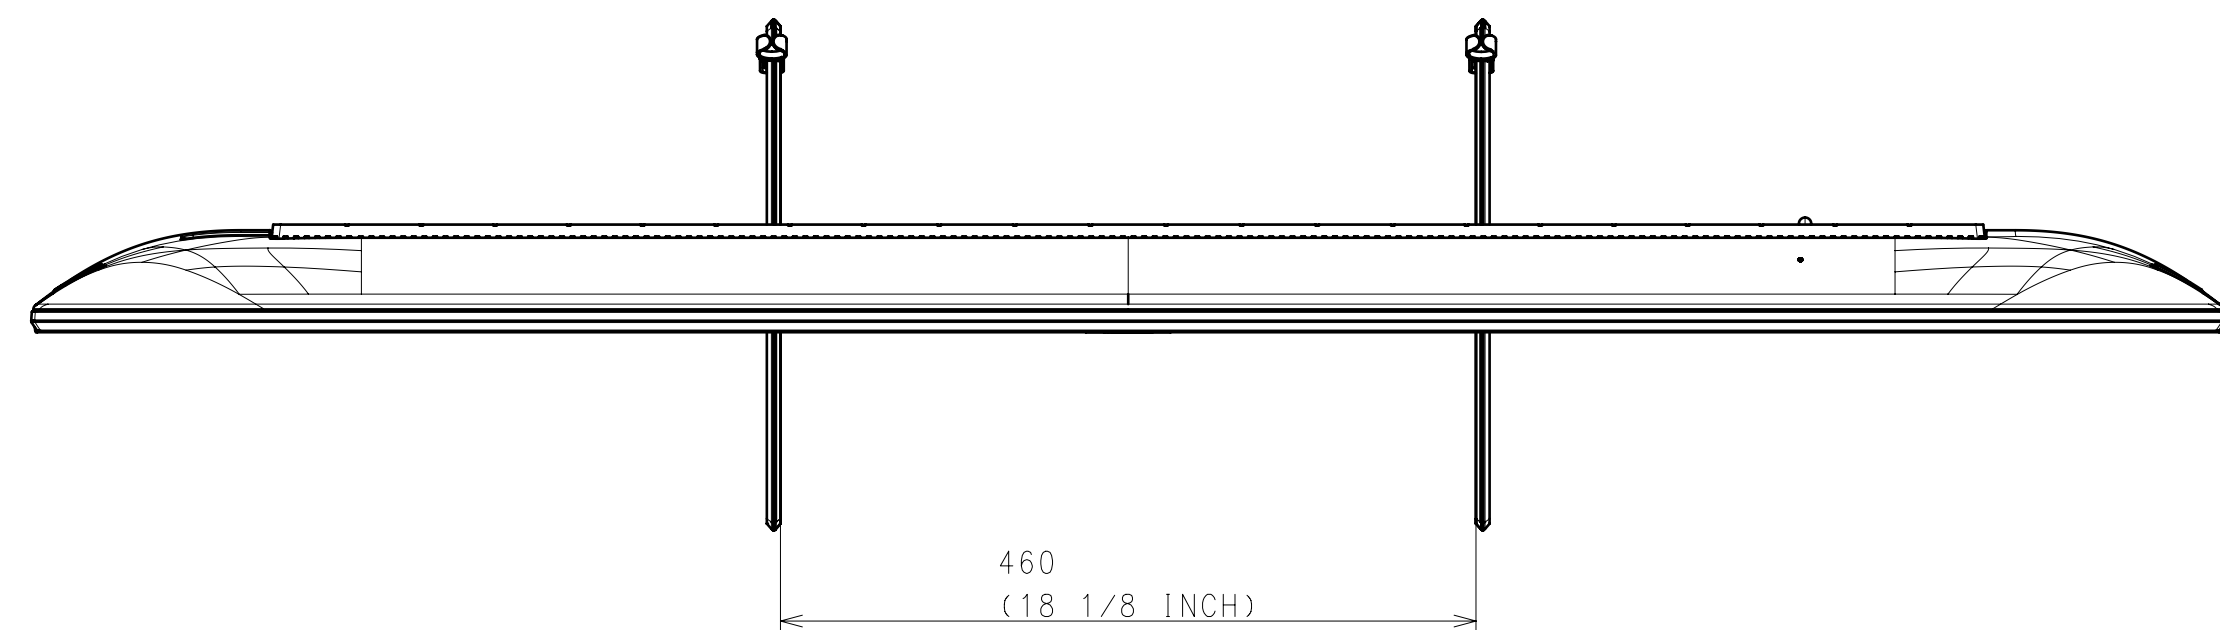



WITH STAND

CENTER STAND (STANDARD POSITION)
XR-65X92J (EUROPE DERIVATIVE 1) only

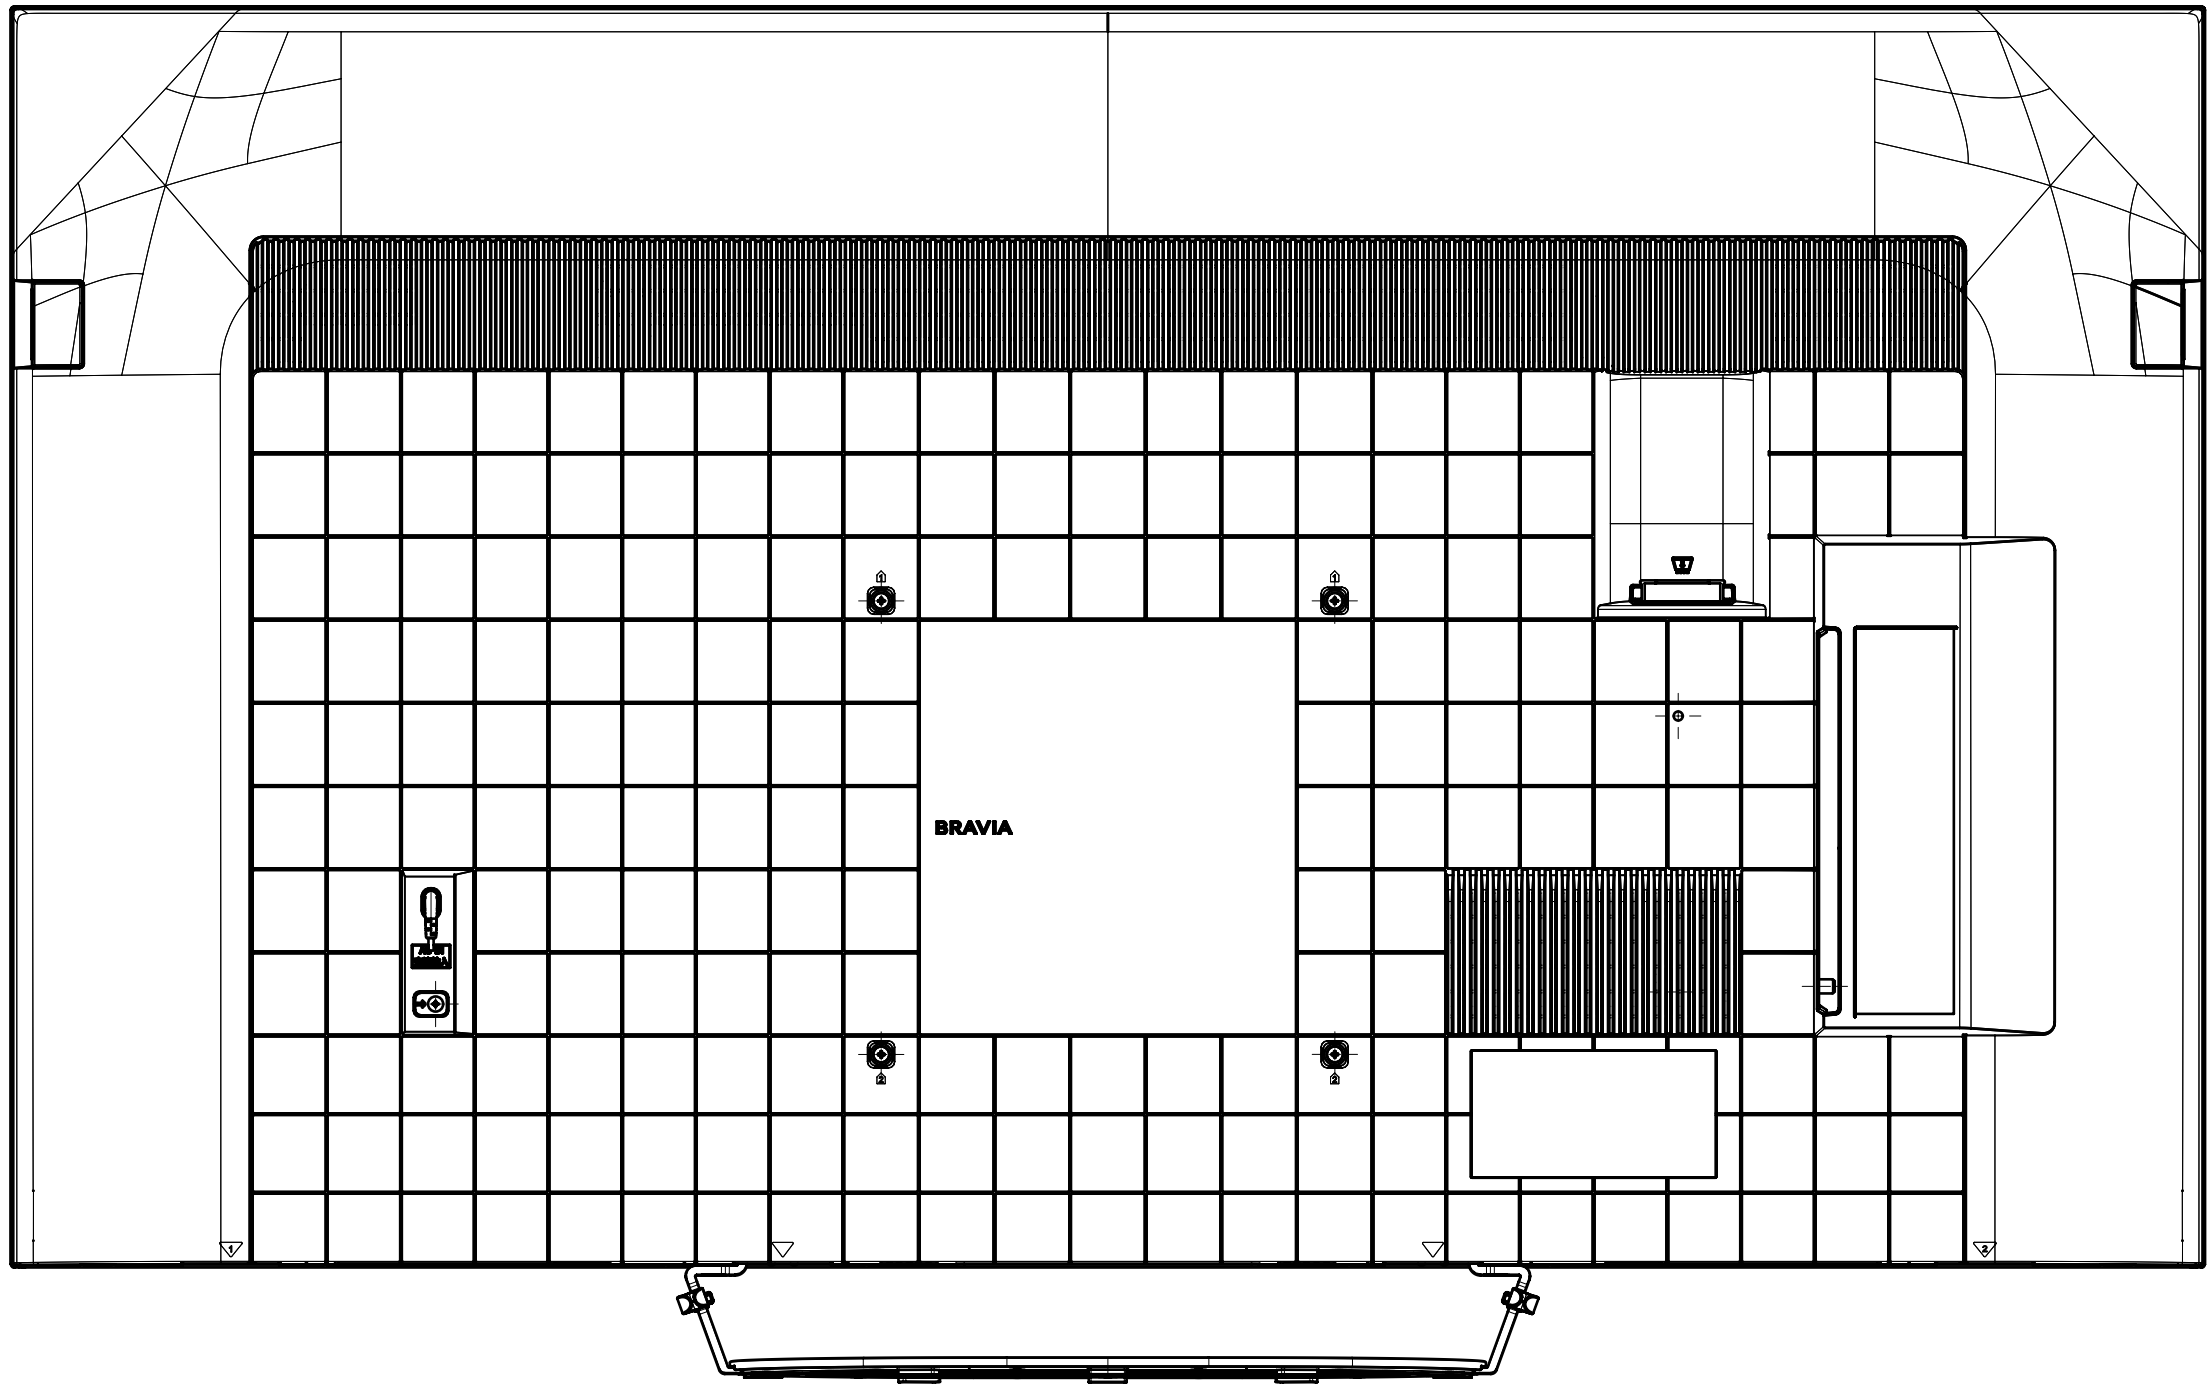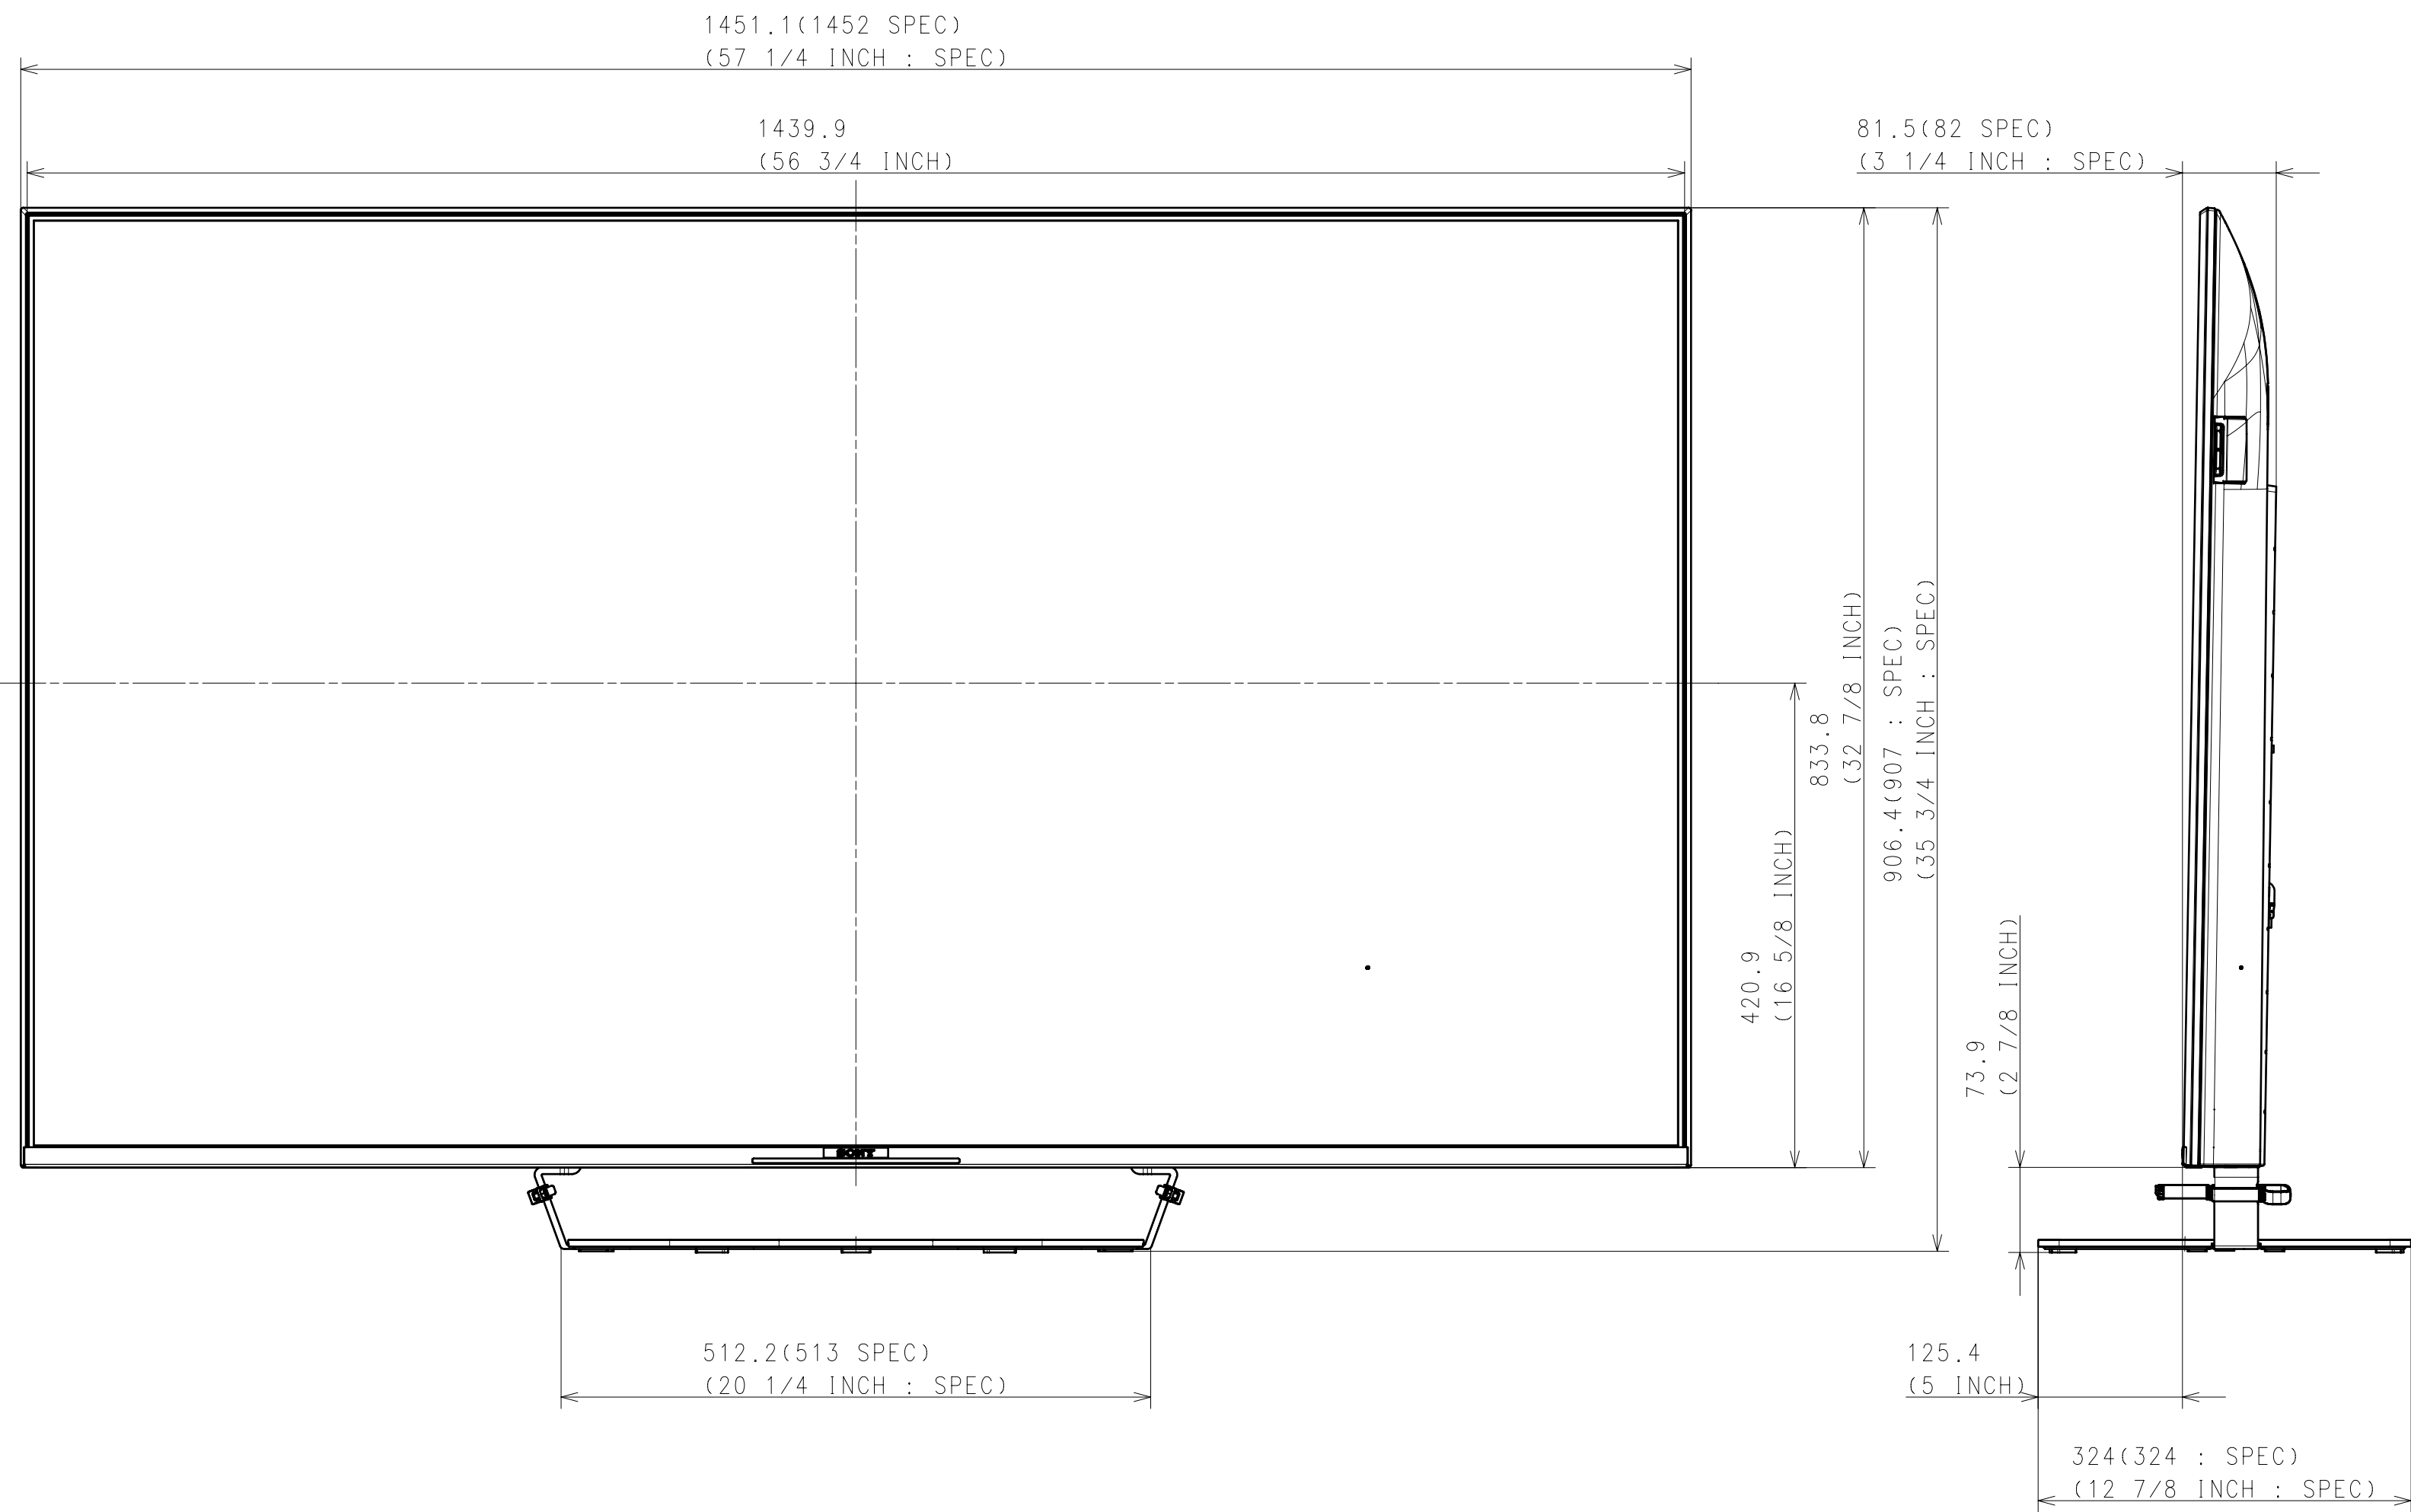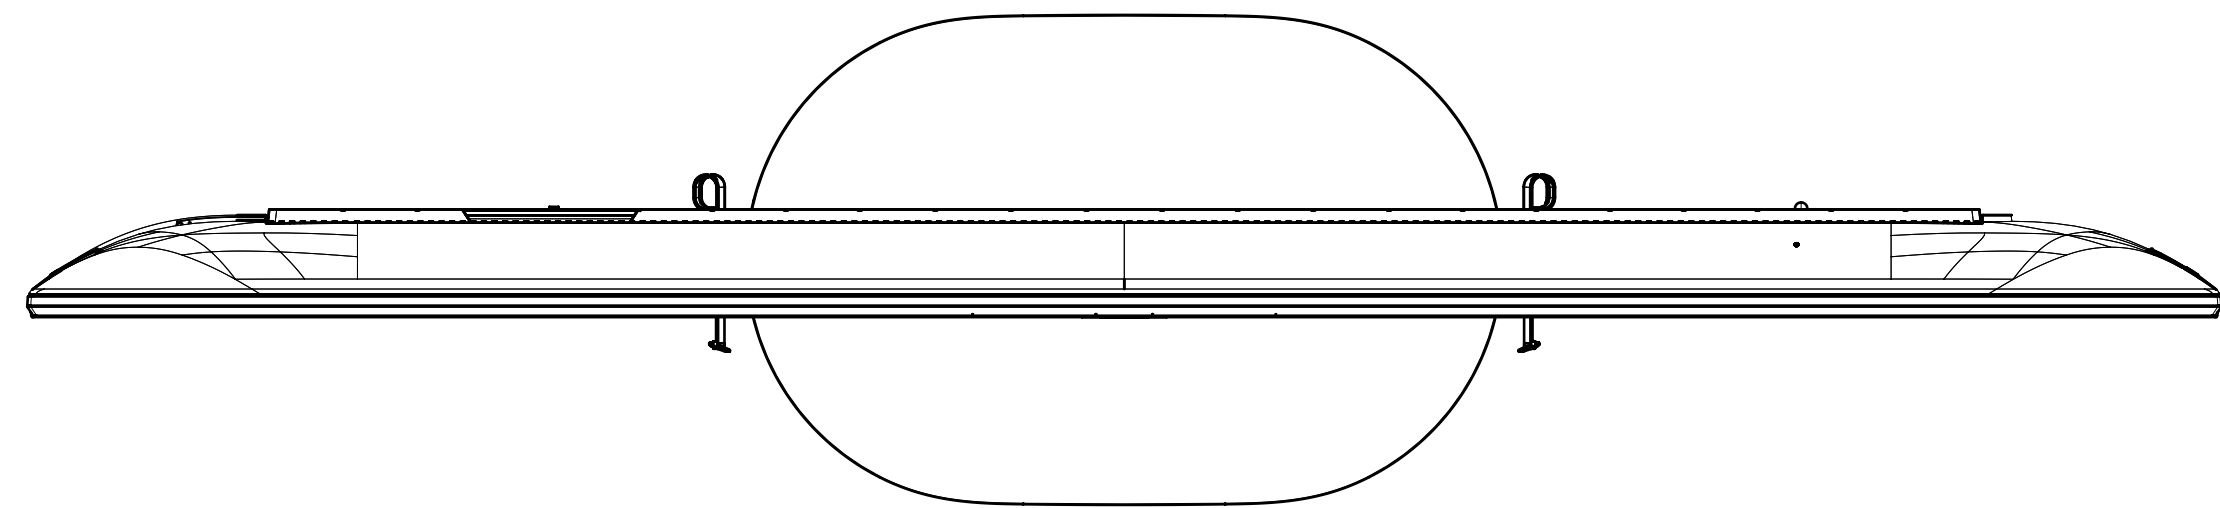

WITH STAND

PREMIUM EDGE STAND (STANDARD POSITION)
XRJ-65X90J (JAPAN) &
XR-65X94J (EUROPE DERIVATIVE 2) only

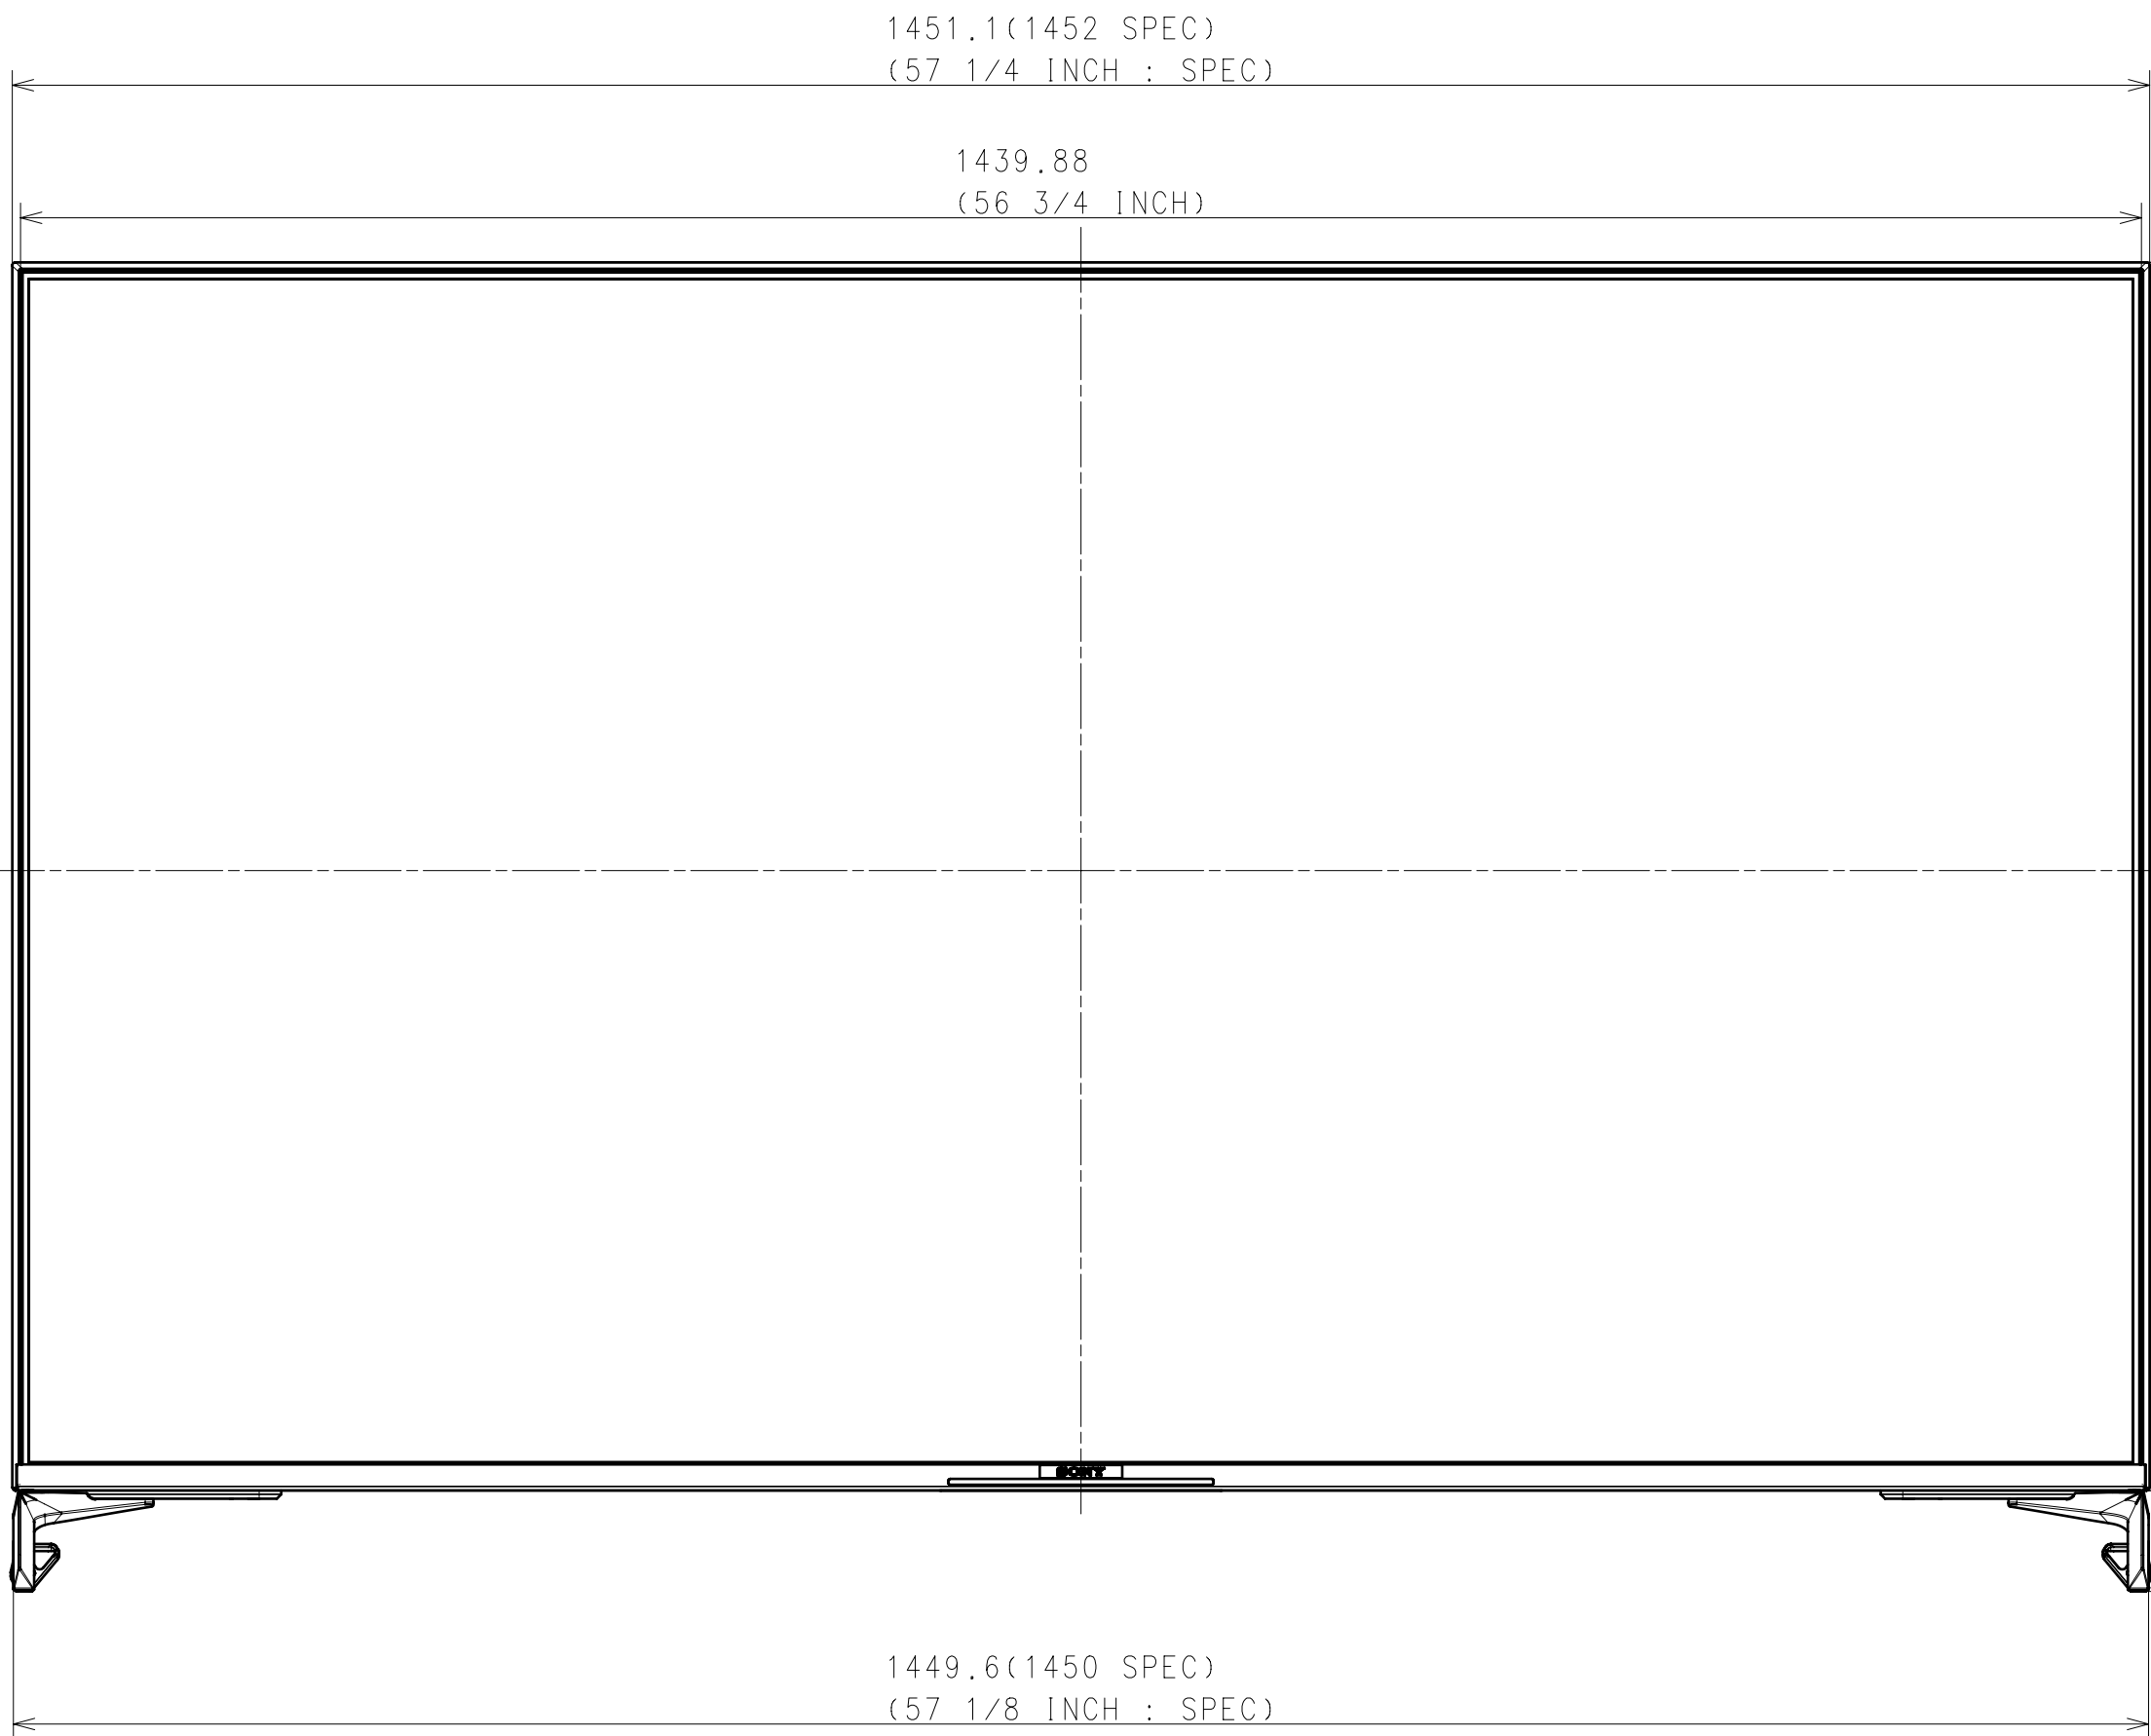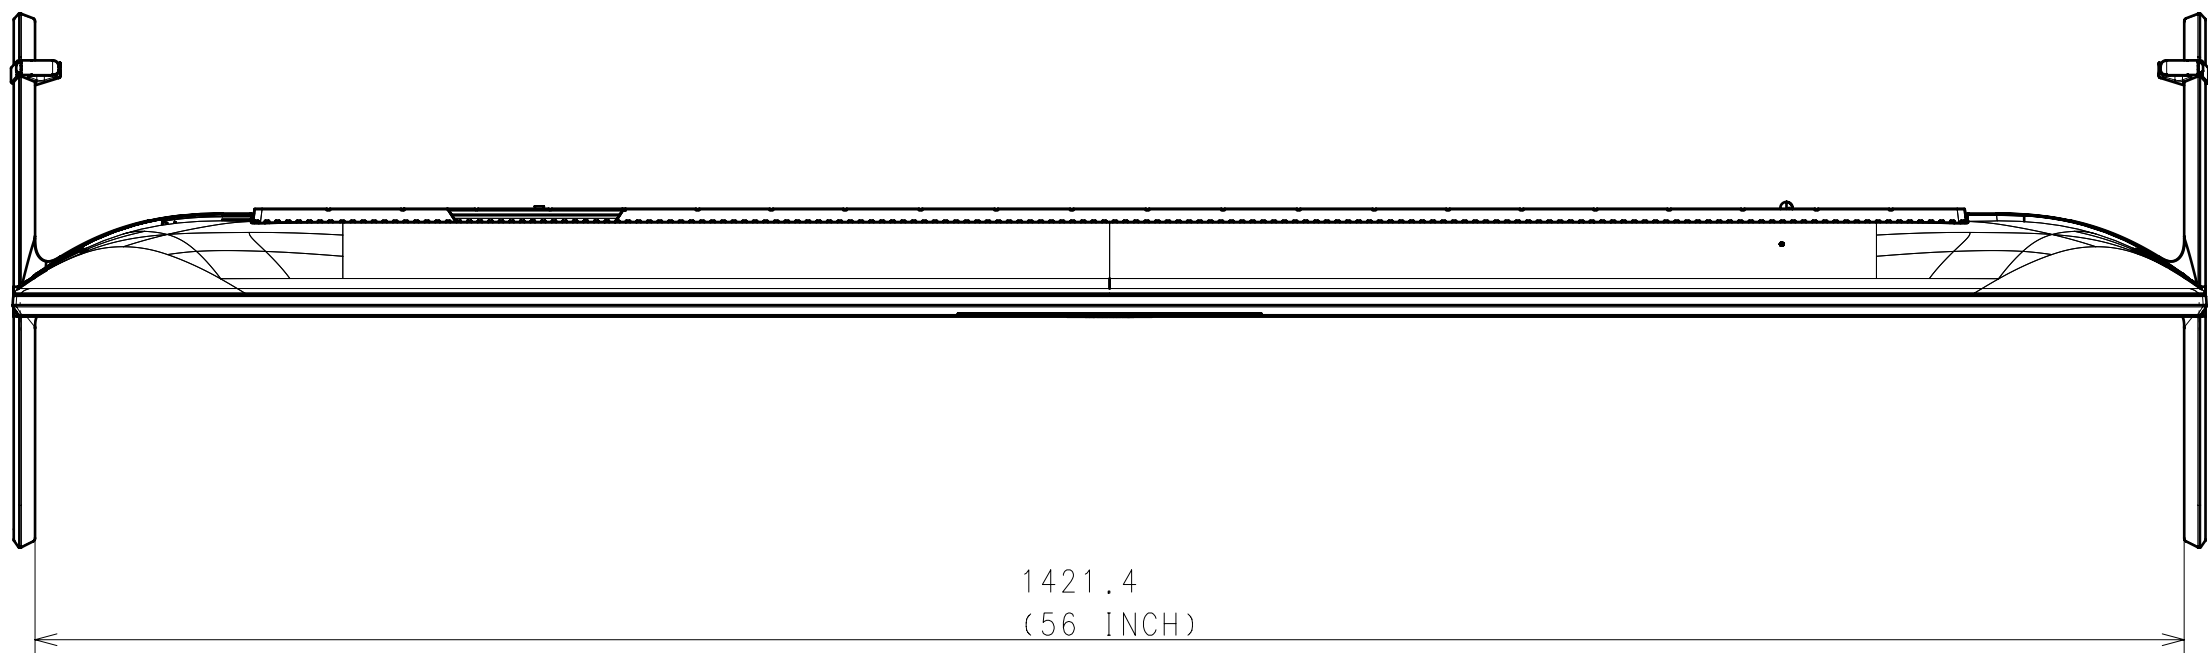

81.5(82 SPEC)
(3 1/4 INCH : SPEC)


833.8
(32 7/8 INCH)
902.3(903 SPEC)
(35 5/8 INCH : SPEC)

420.9
(16 5/8 INCH)

68.7
(2 3/4 INCH)




153.7
(6 1/8 INCH)

353.1(354 SPEC)
(14 INCH : SPEC)


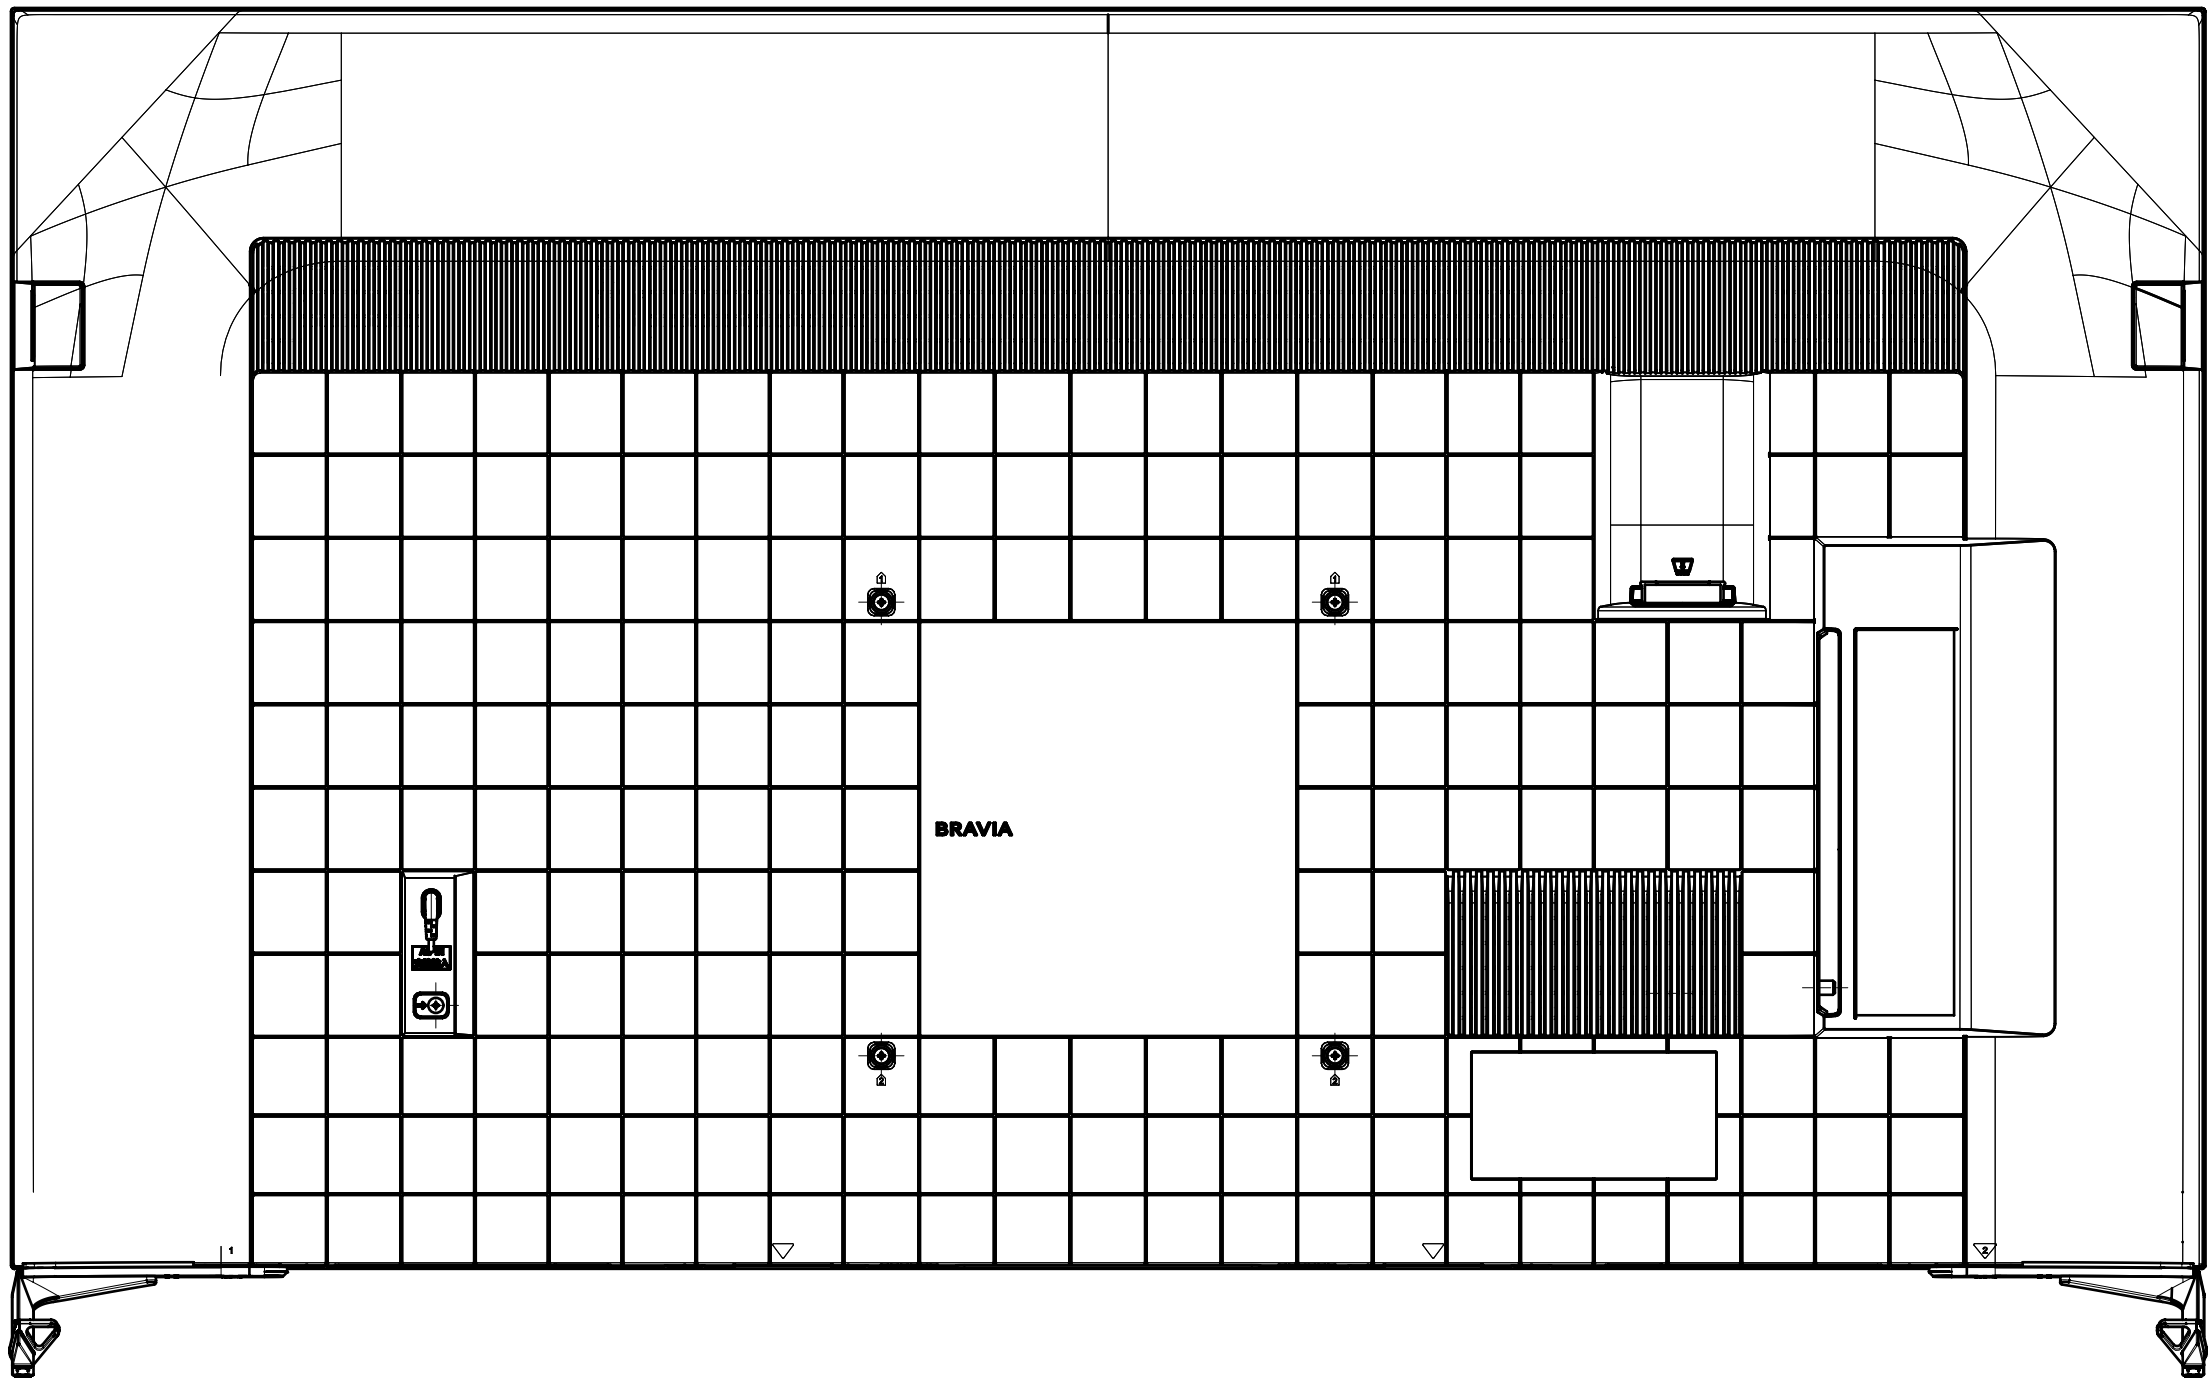


WITH STAND


PREMIUM EDGE STAND (NARROW POSITION)
XRJ-65X90J (JAPAN) &
△ XR-65X94J (EUROPE DERIVATIVE 2) only

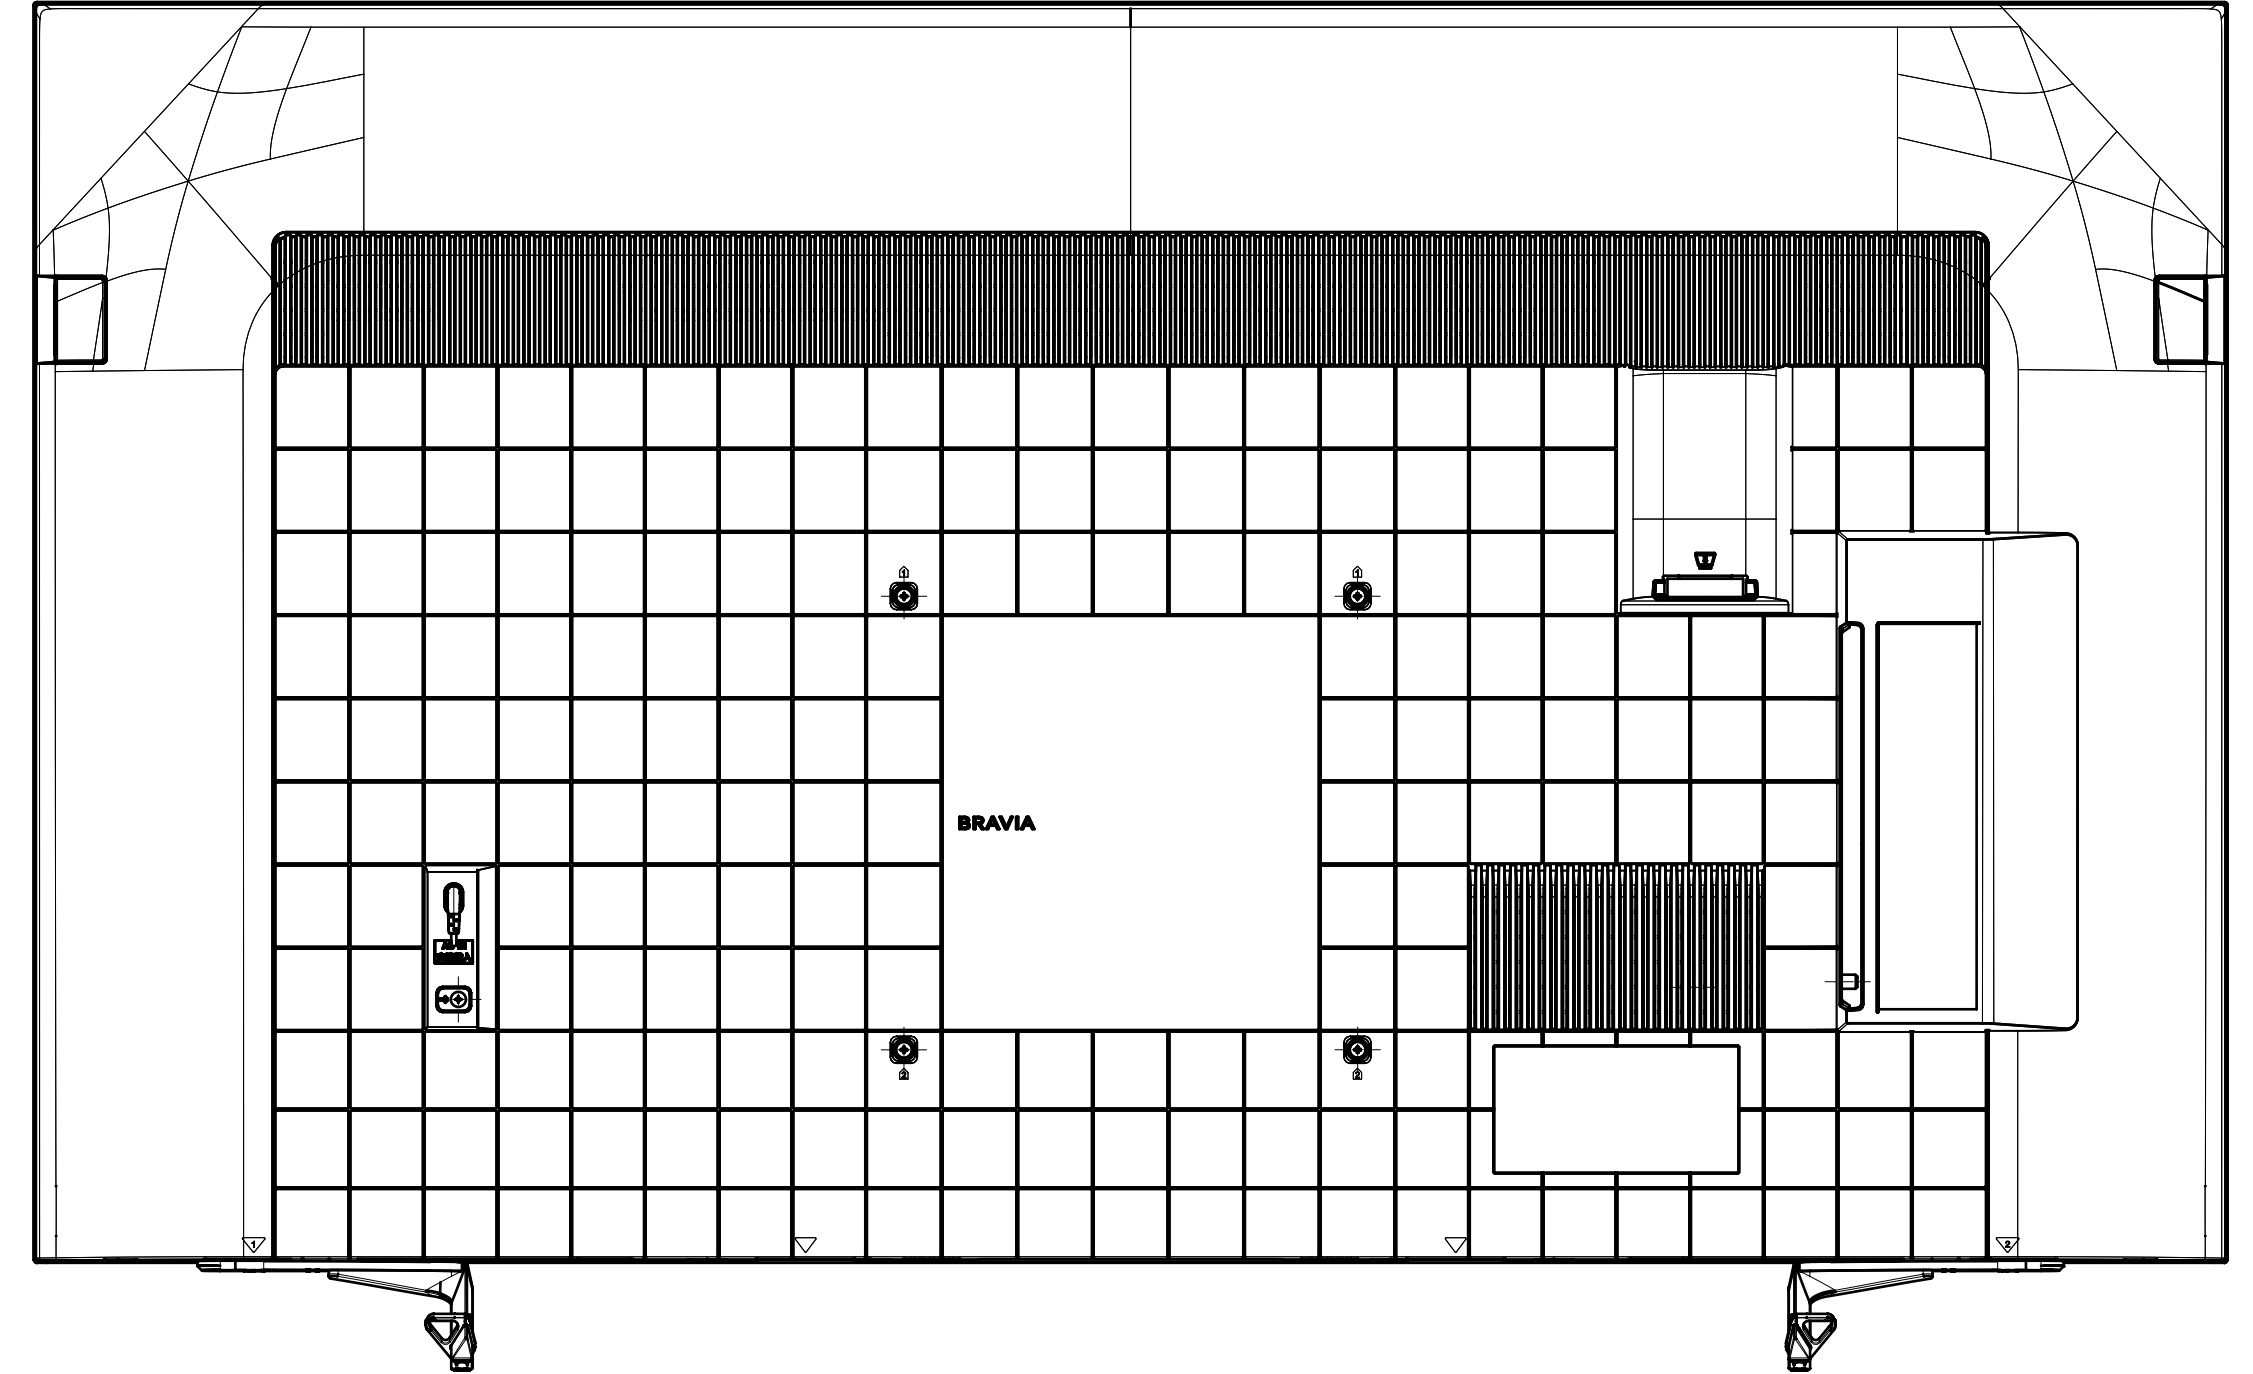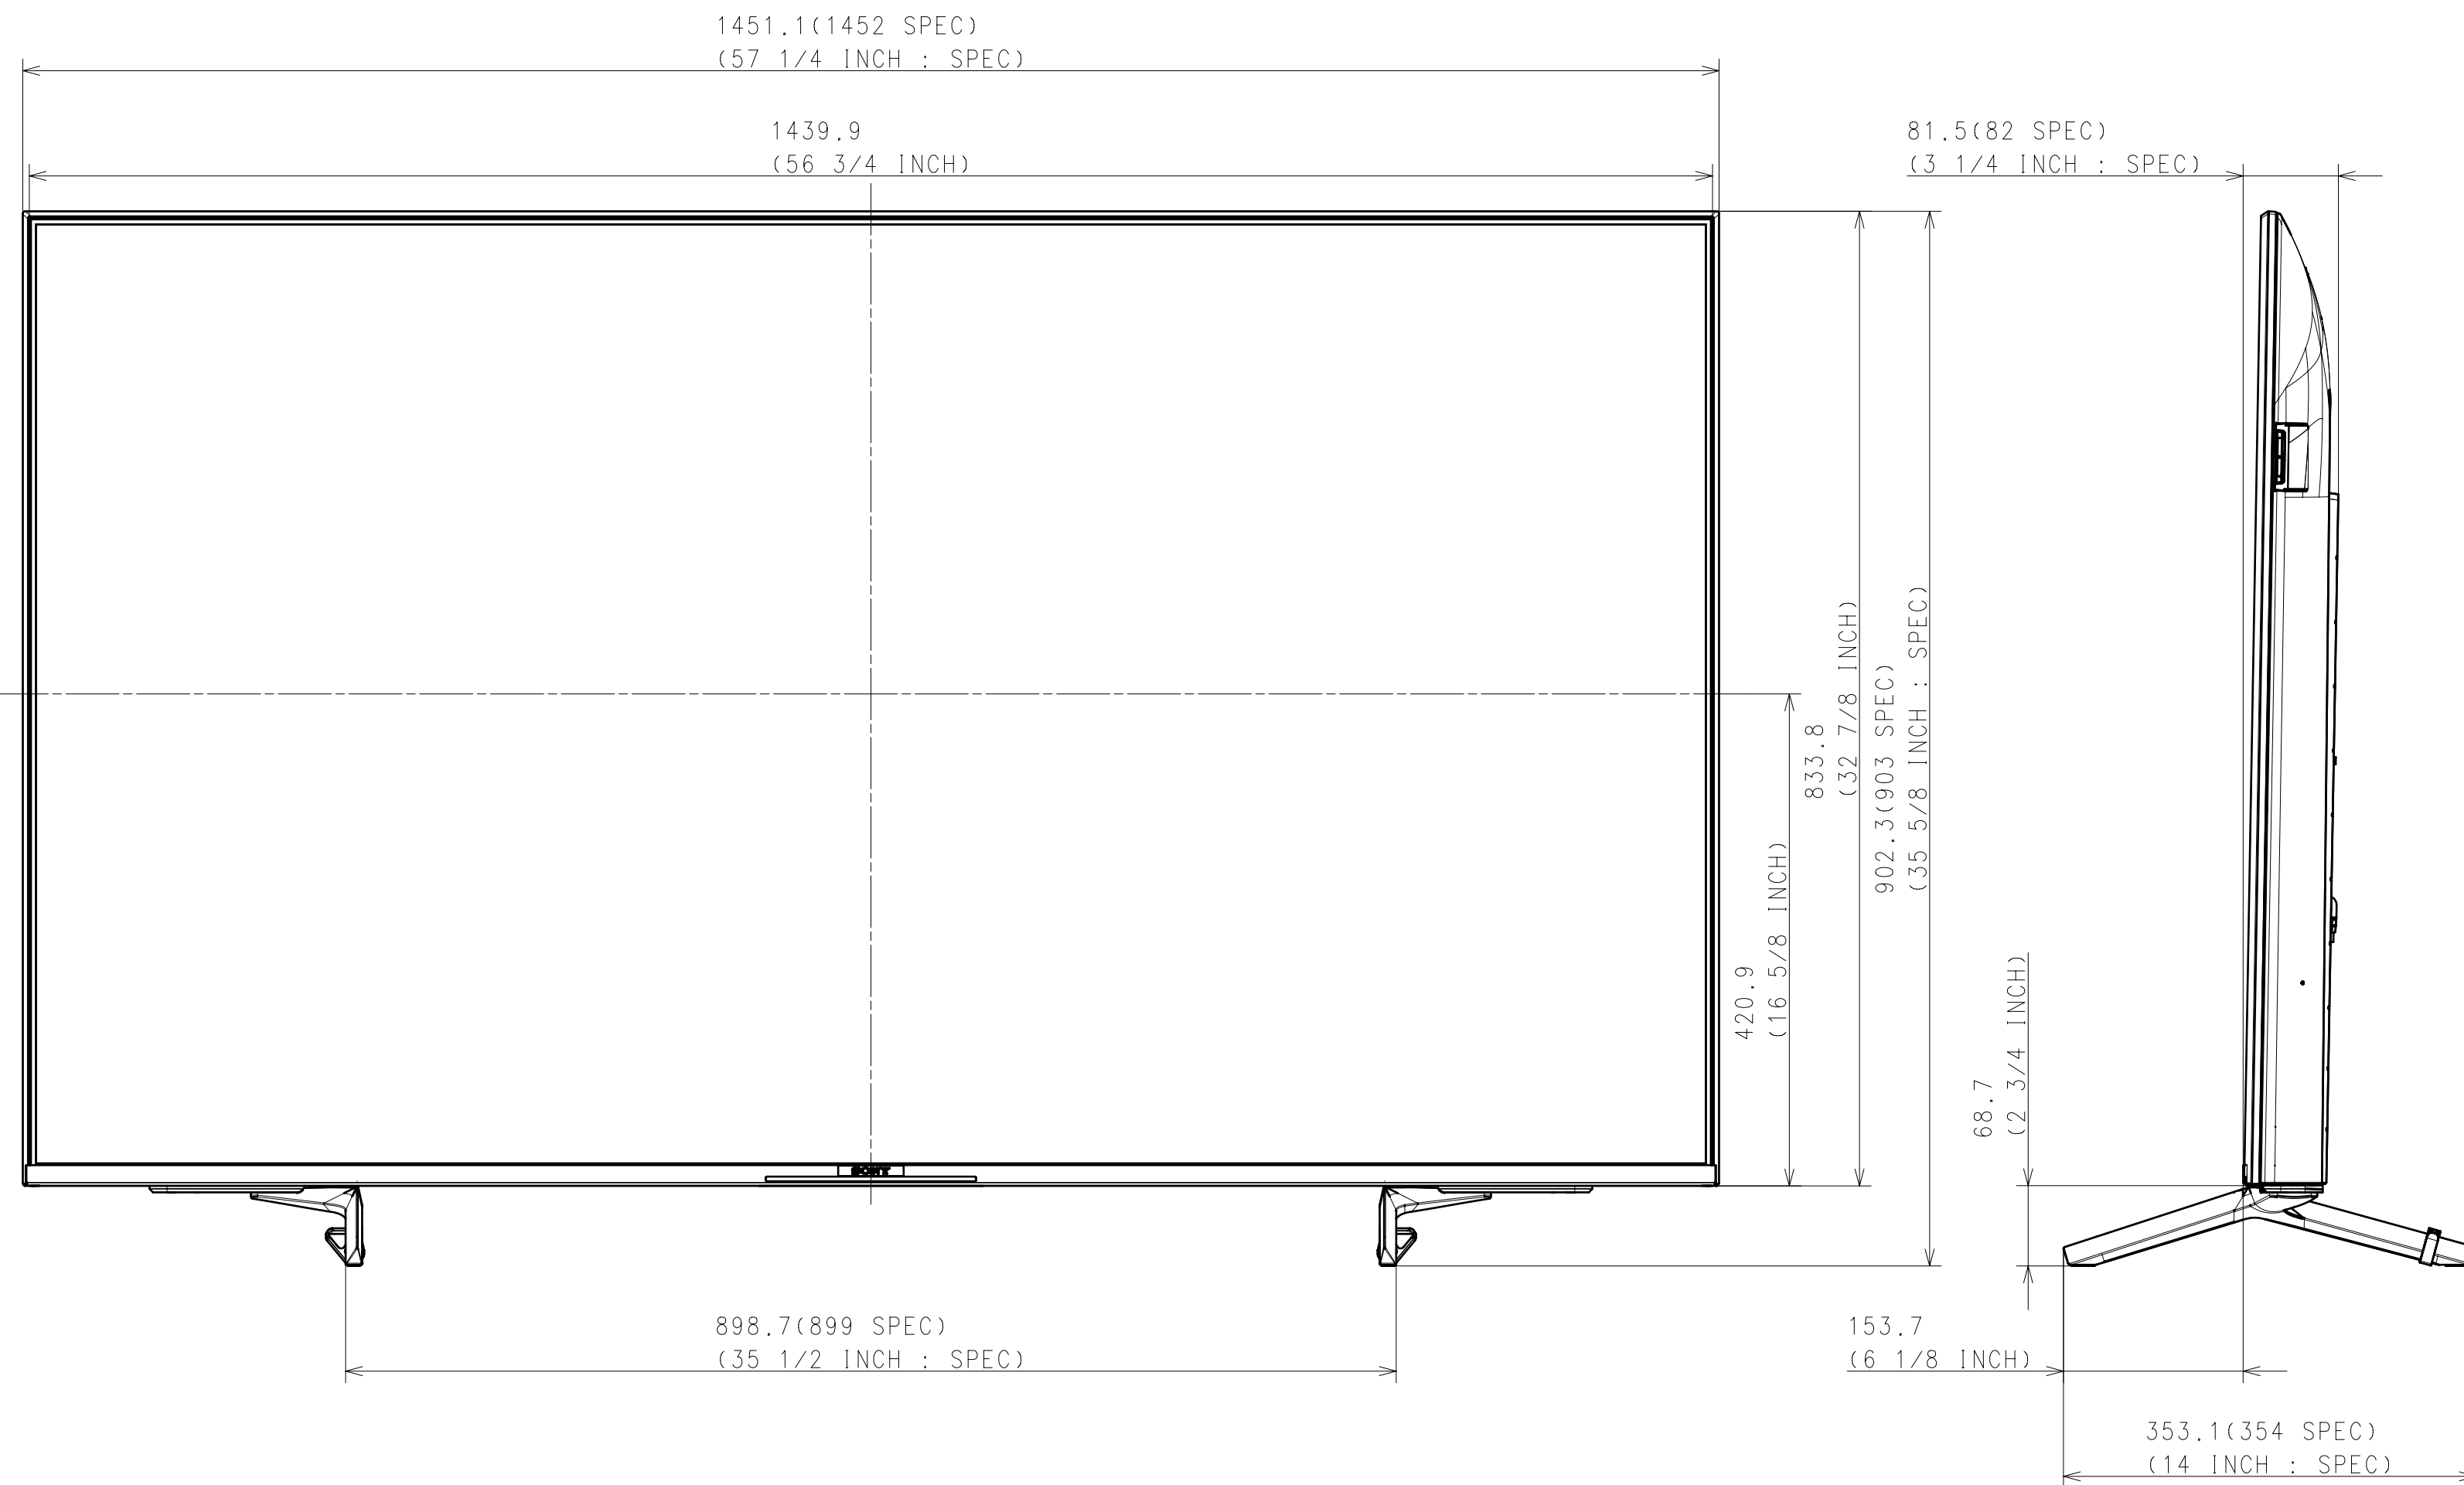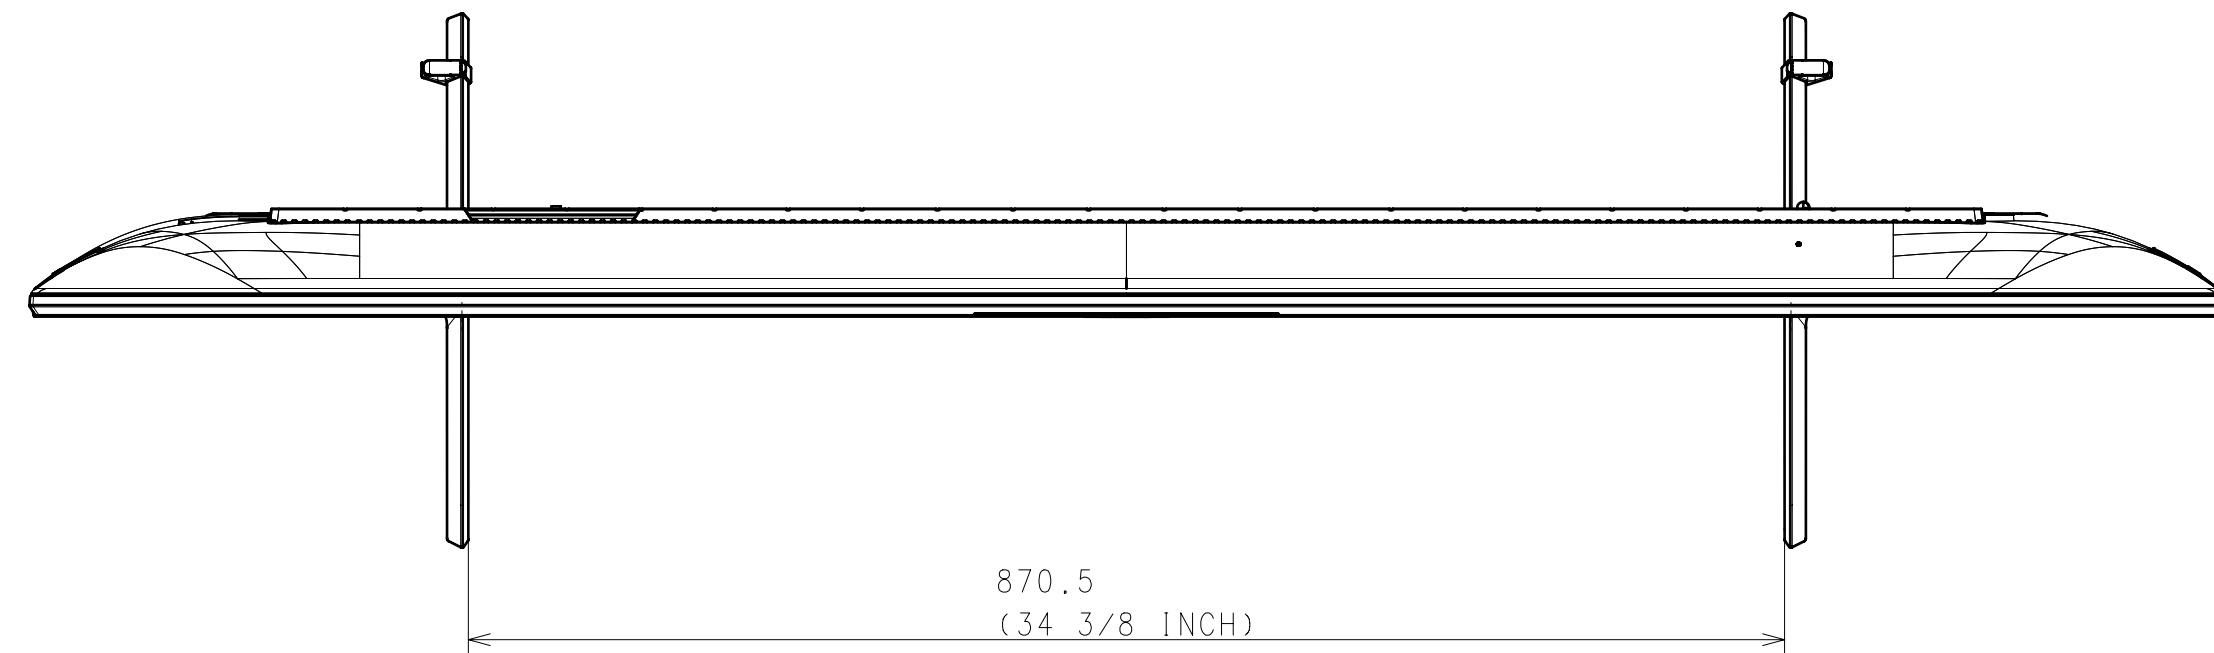


WITHOUT STAND

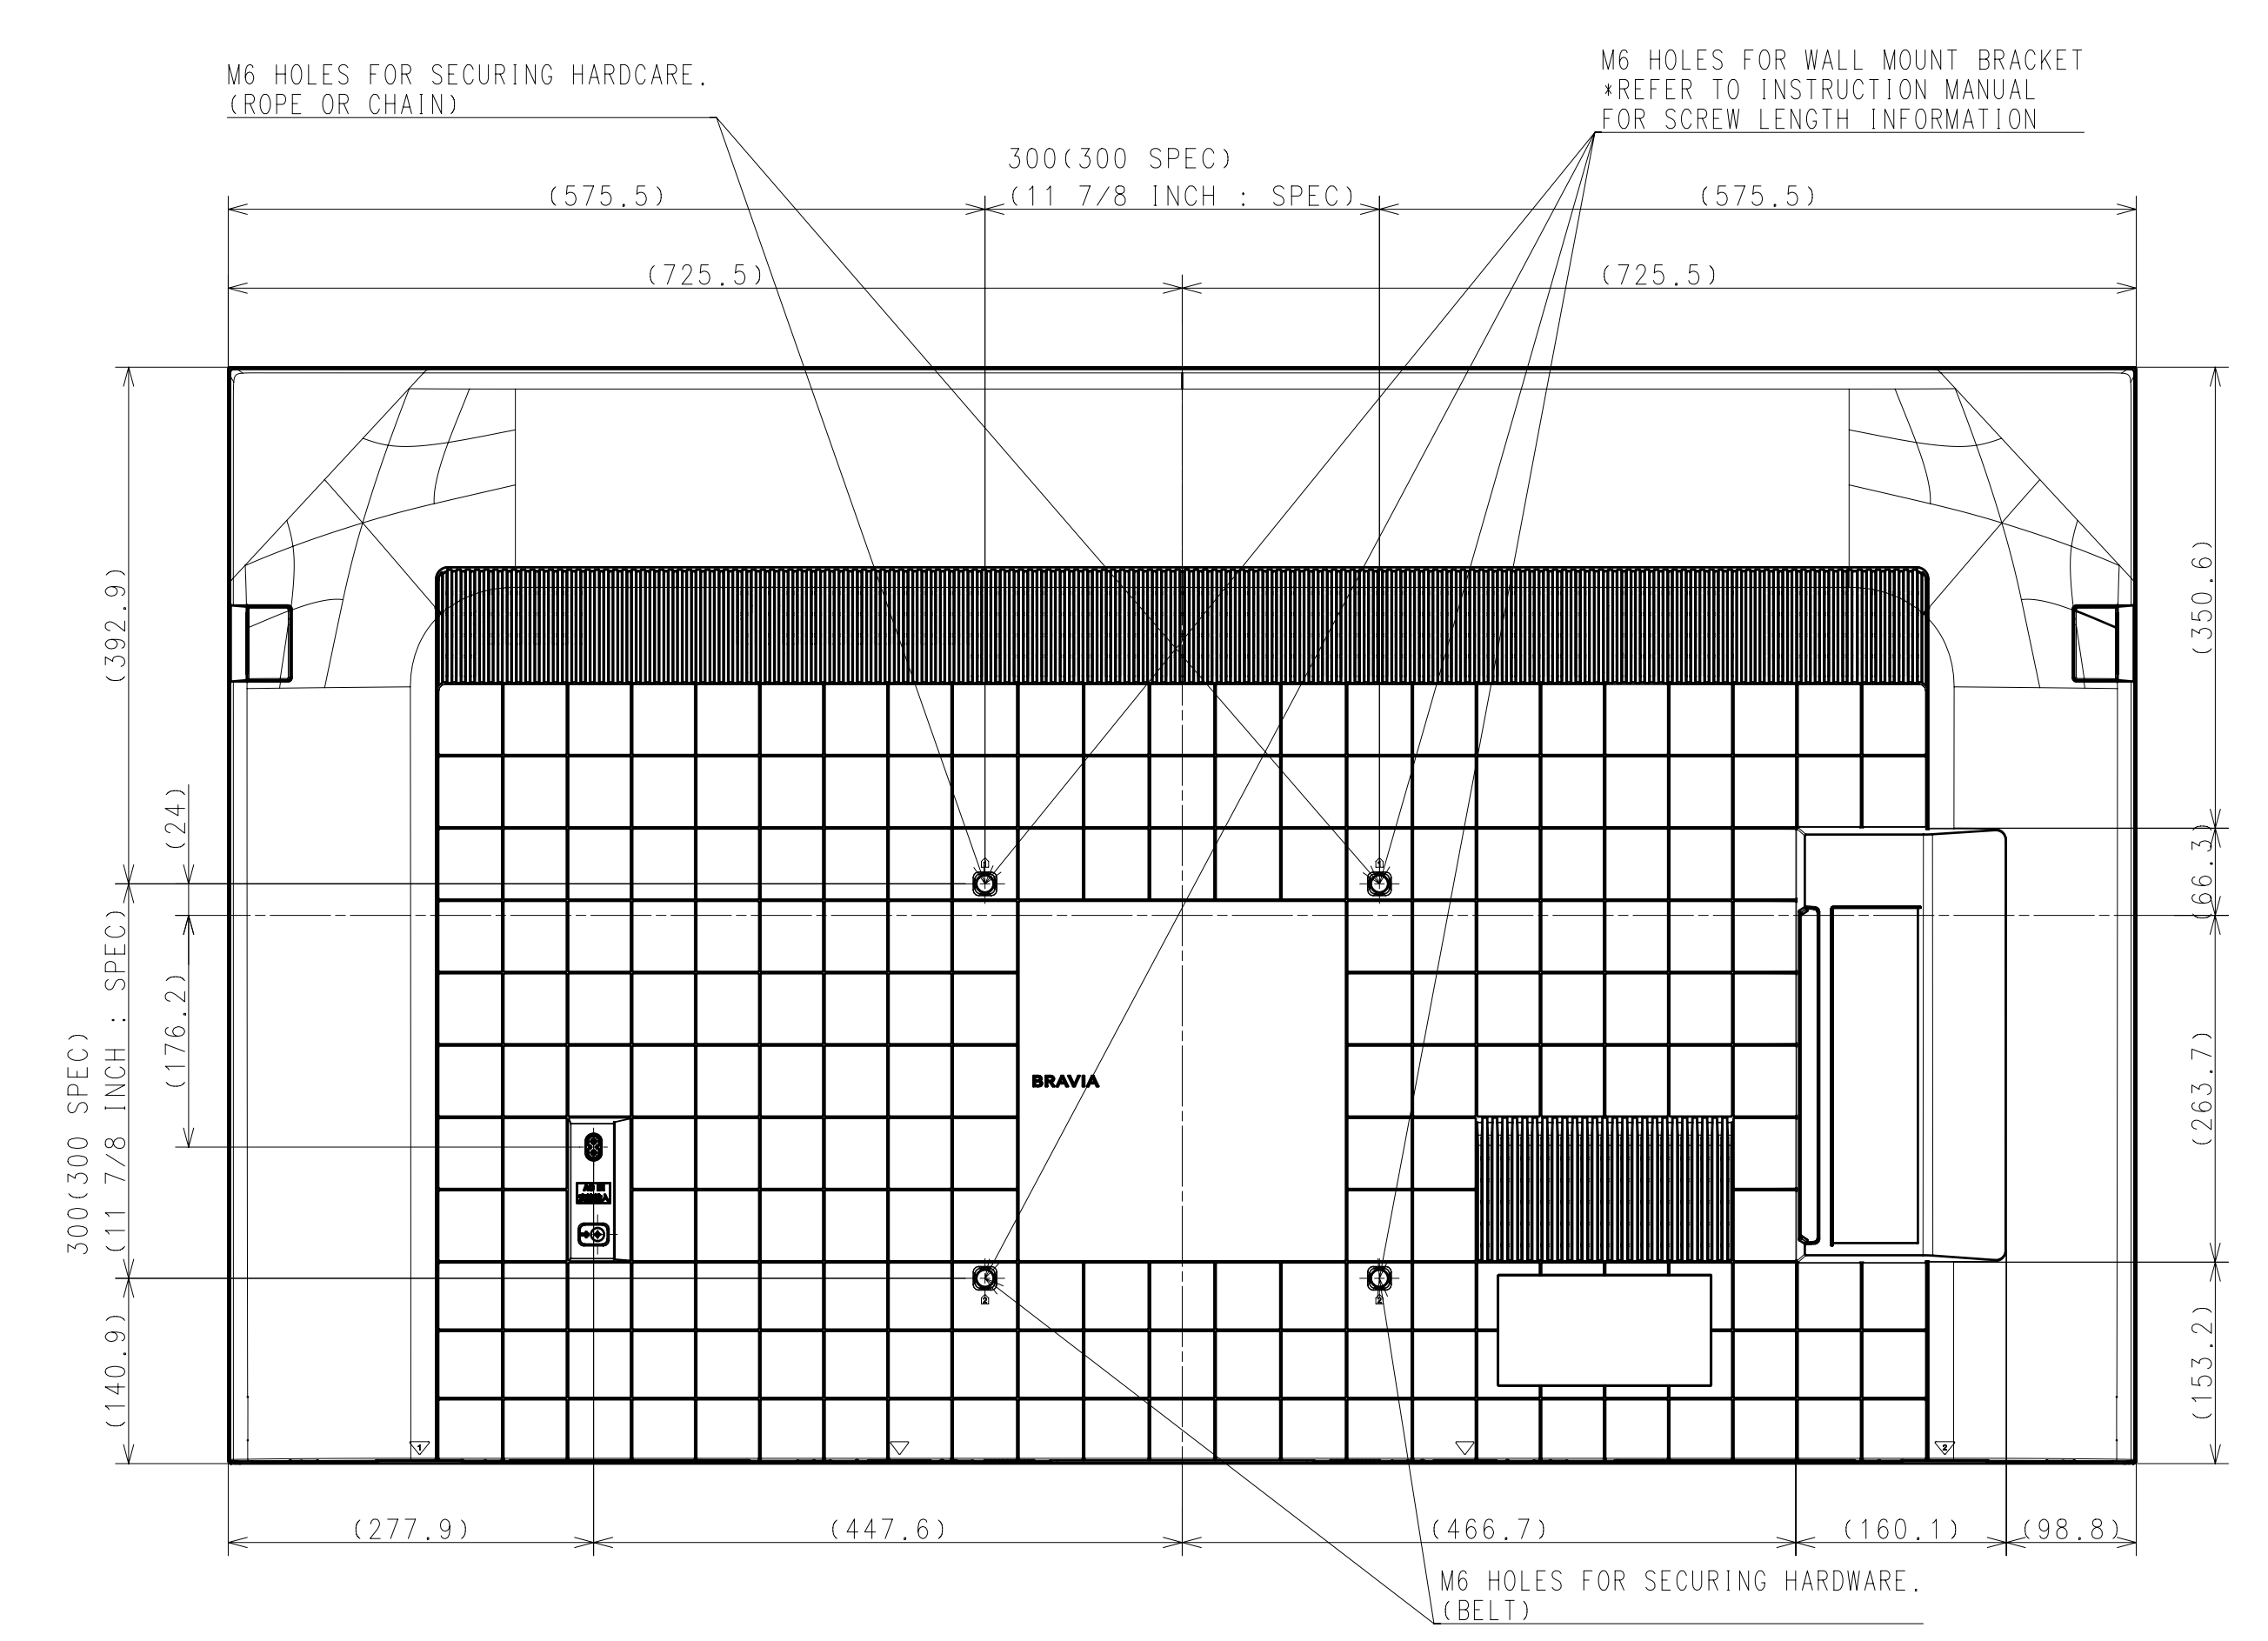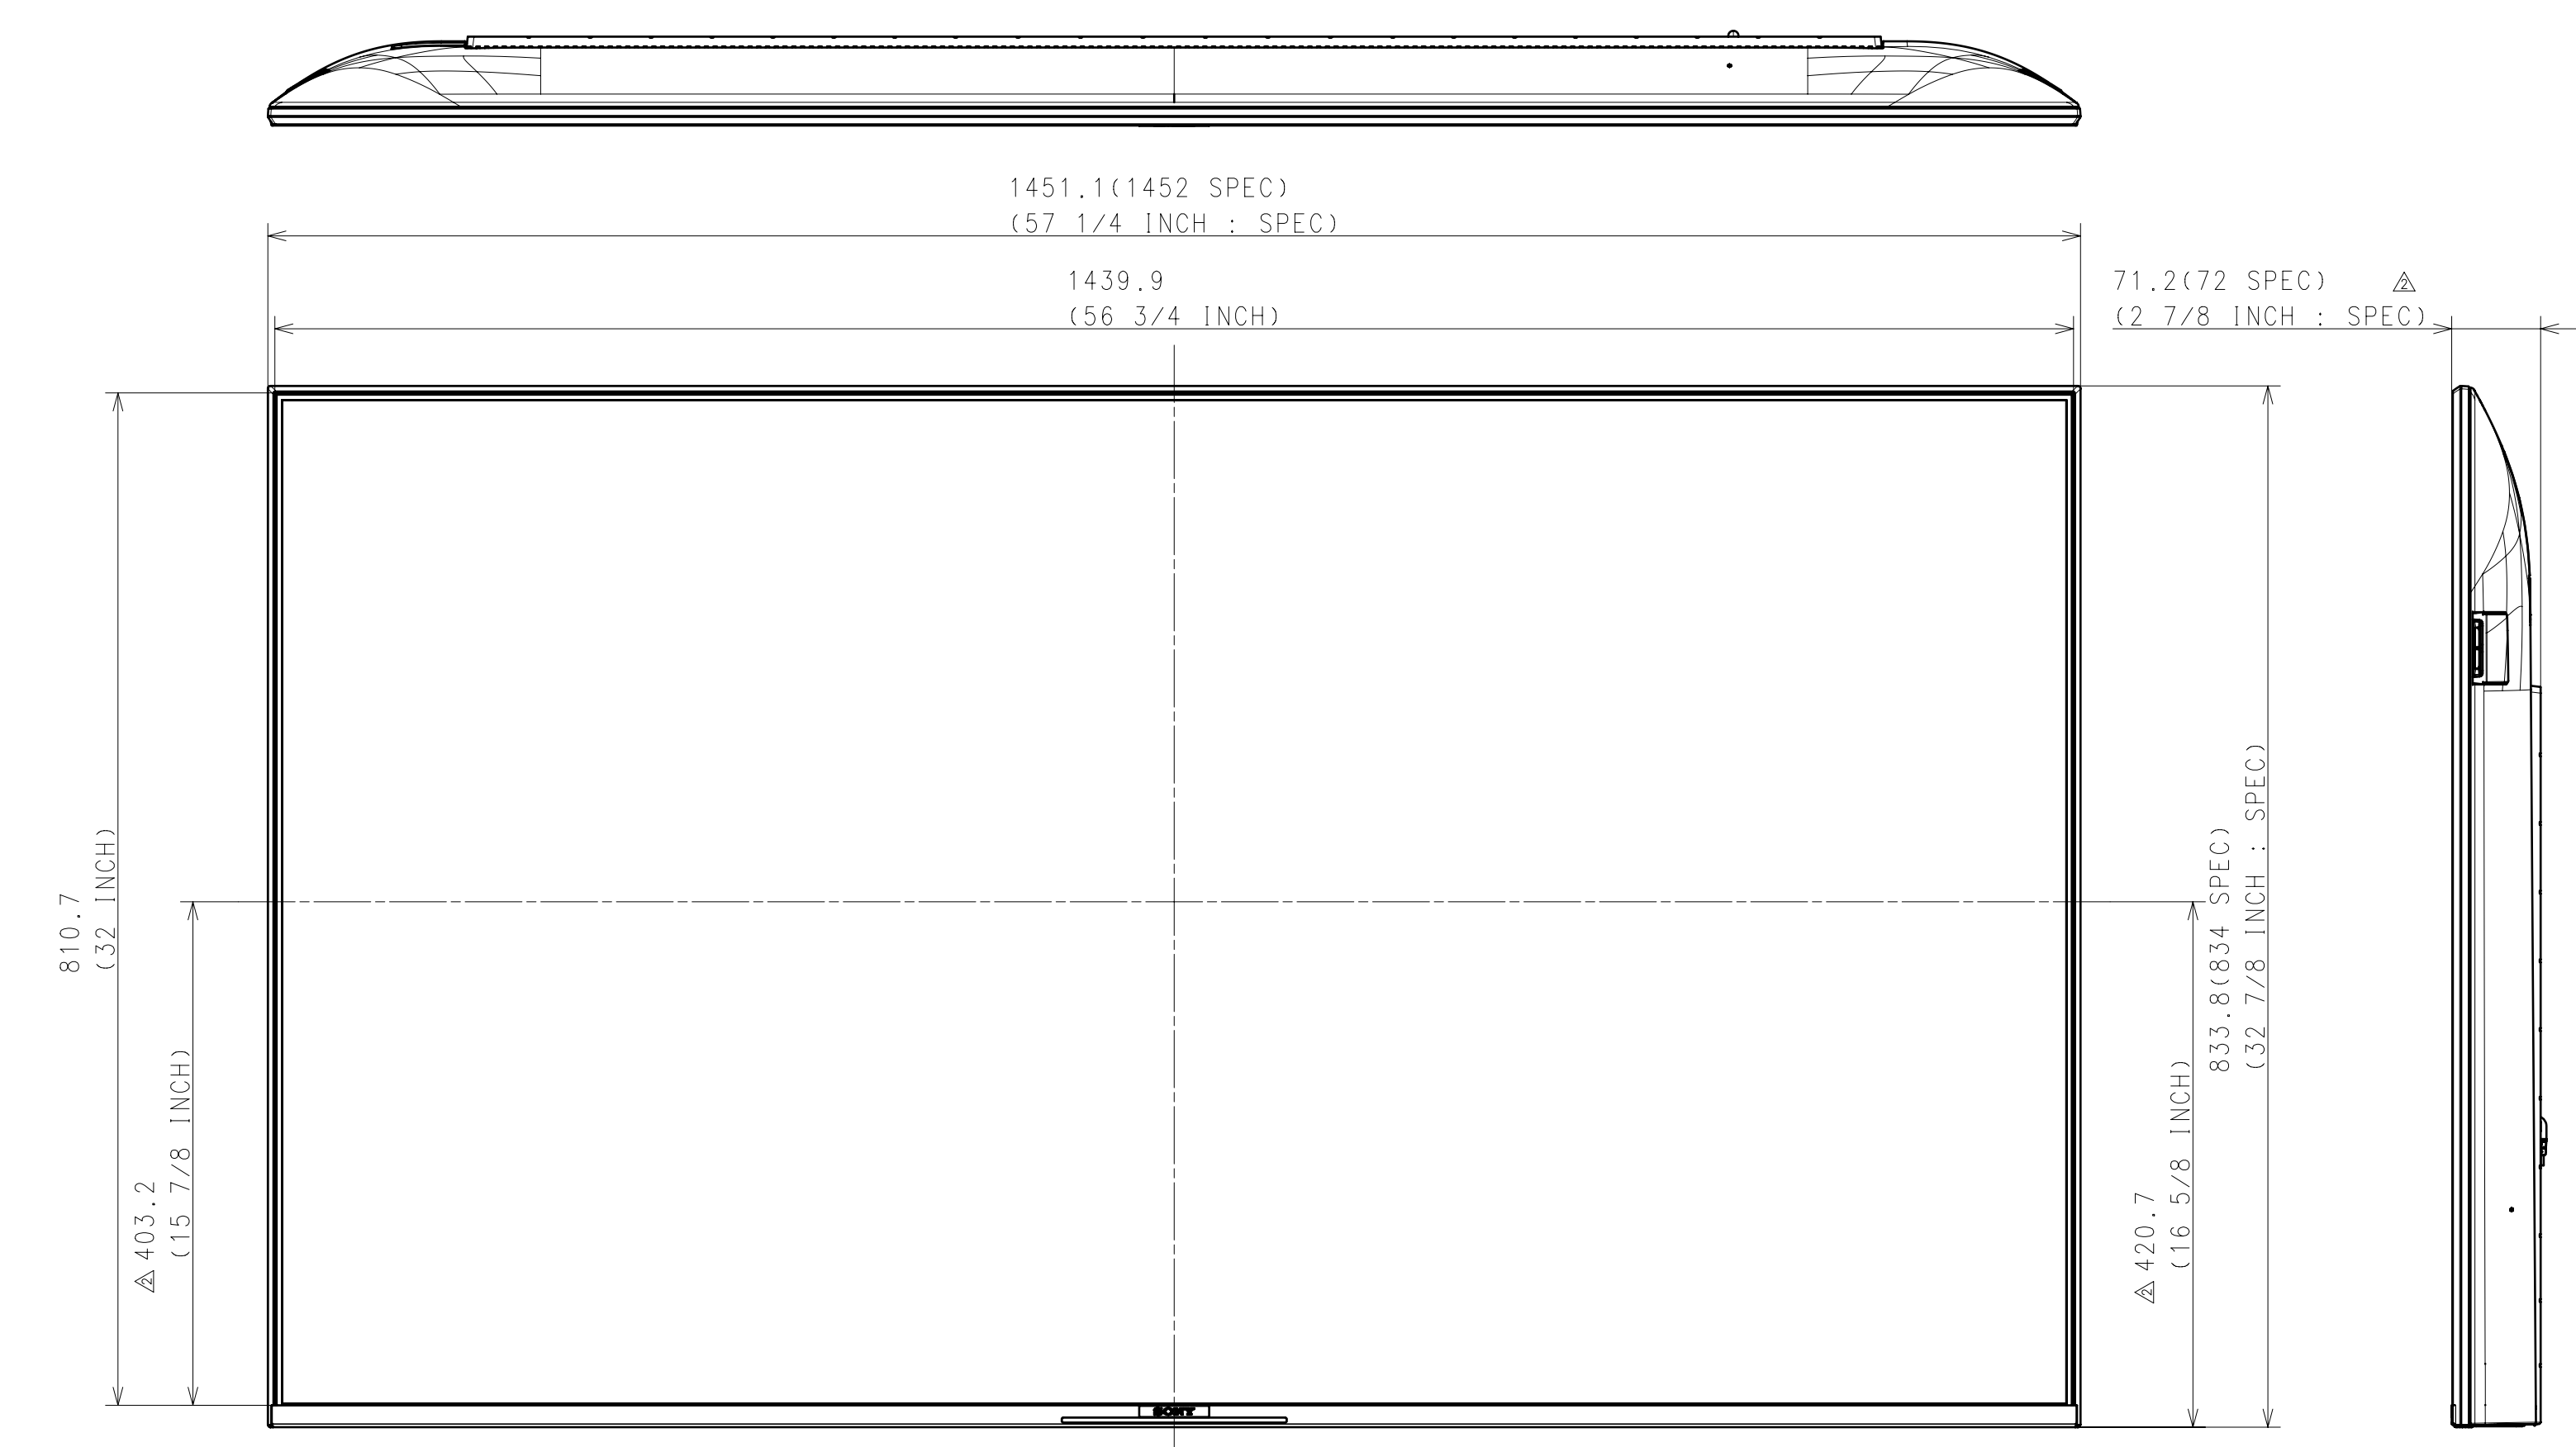

For. NORTH AMERICA, GENERAL AREA, CHINA

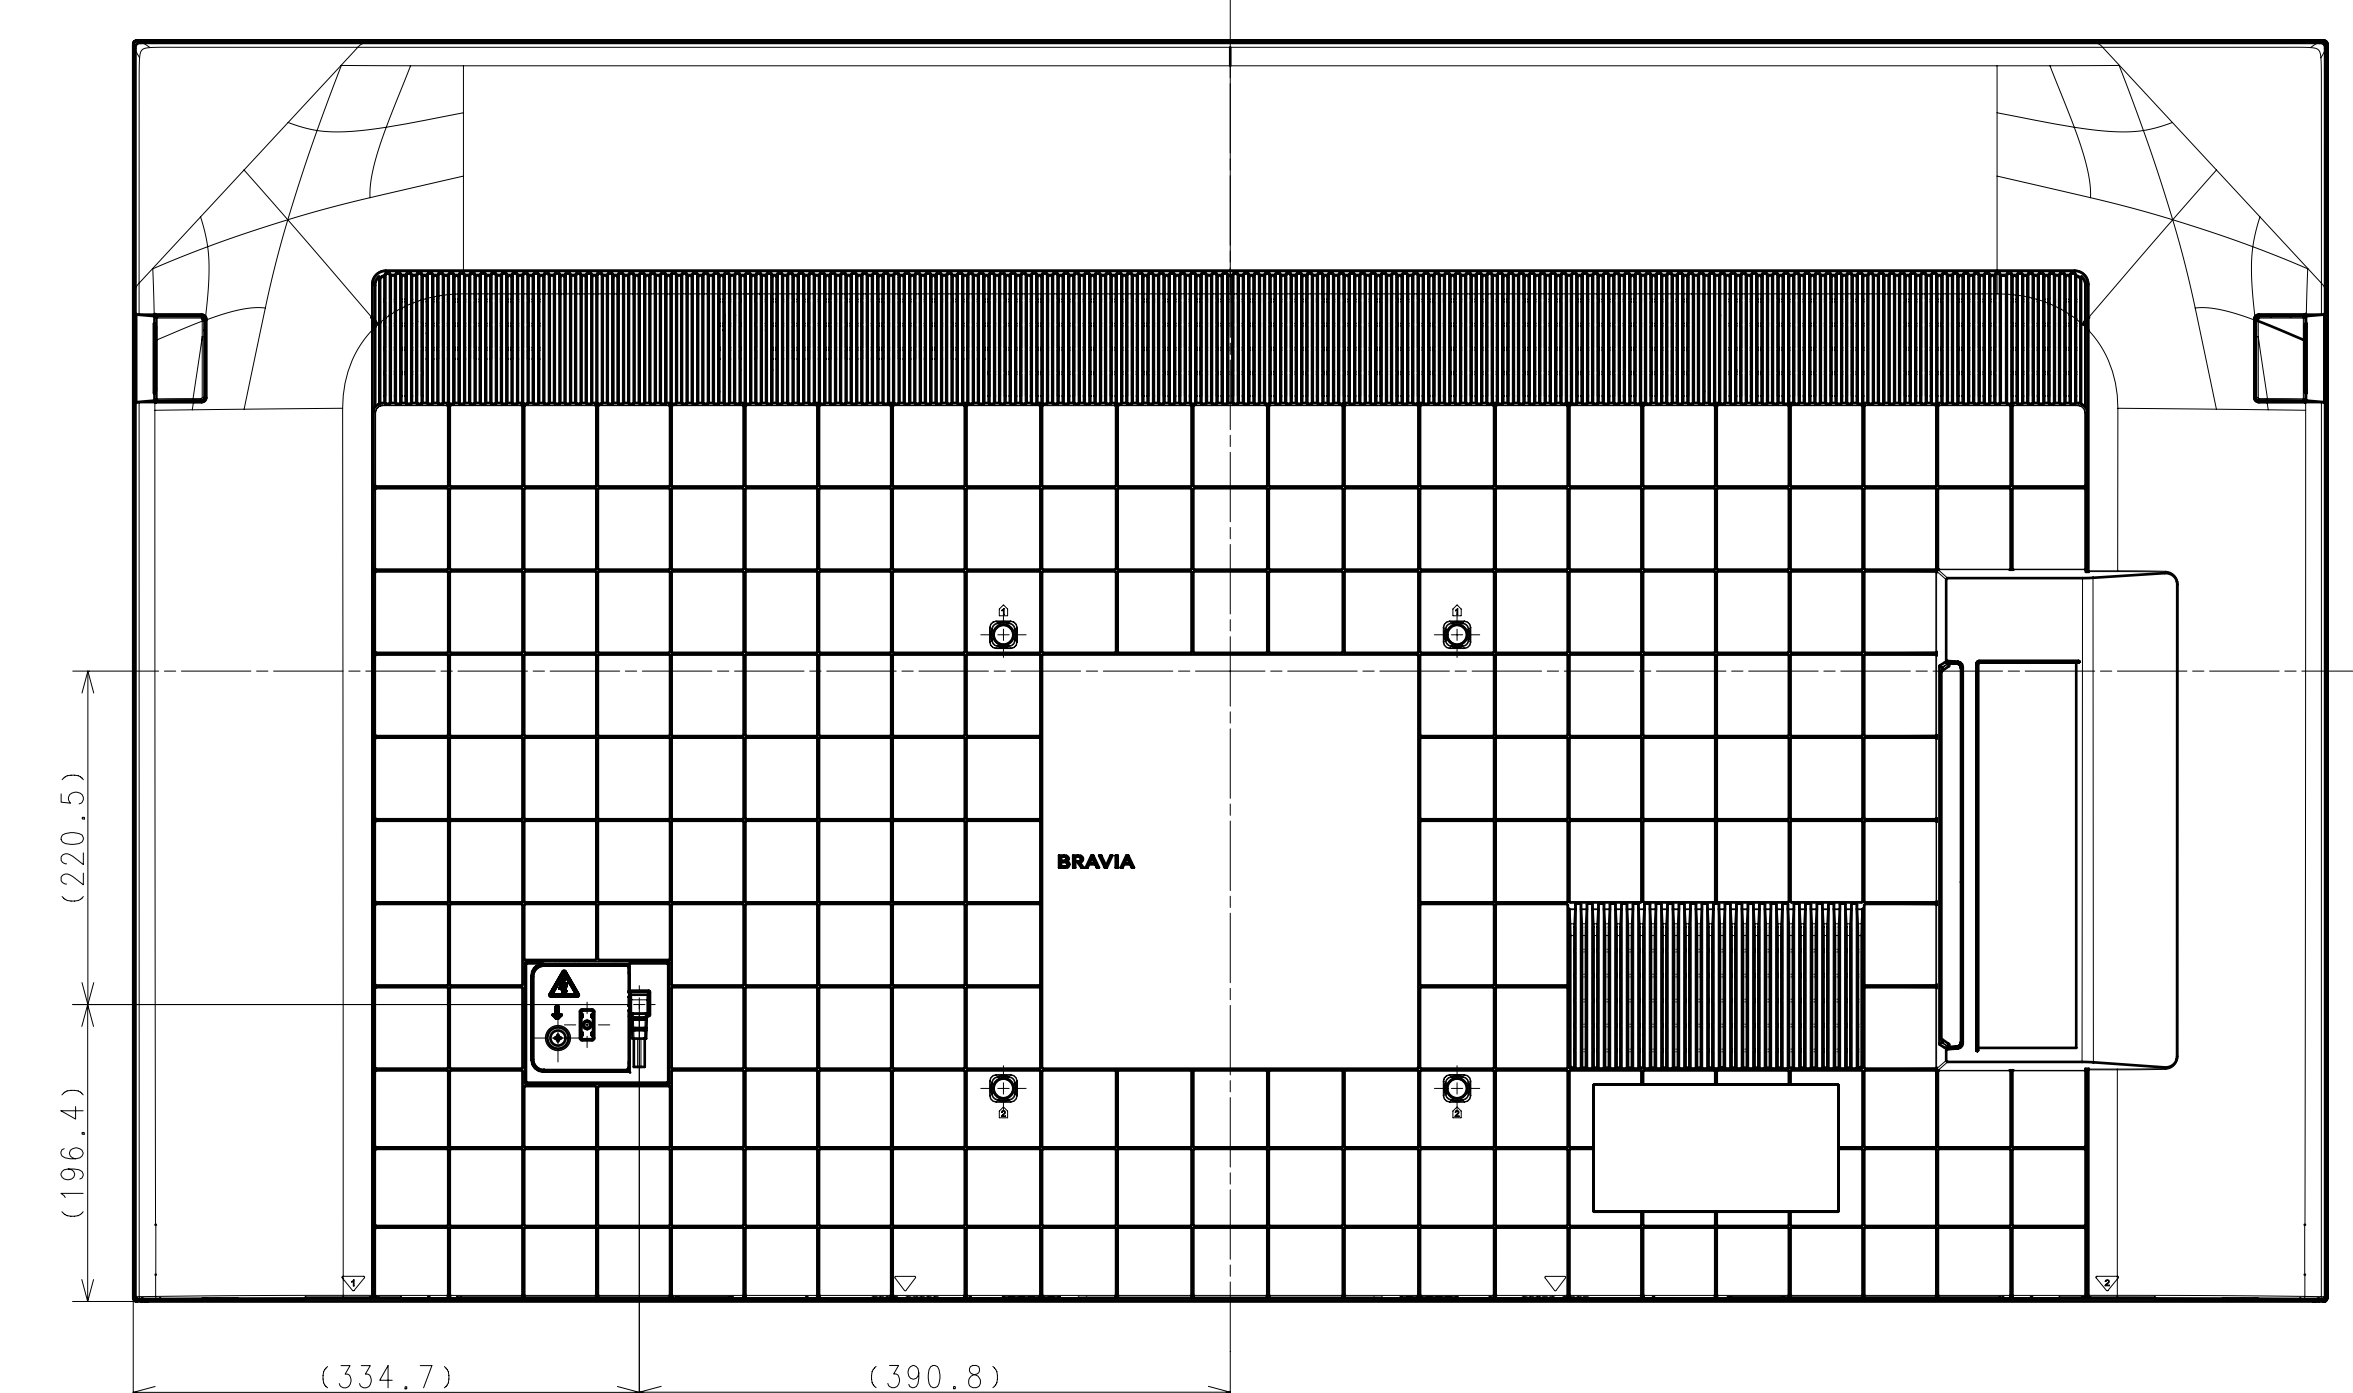


For. JAPAN, LATIN AMERICA

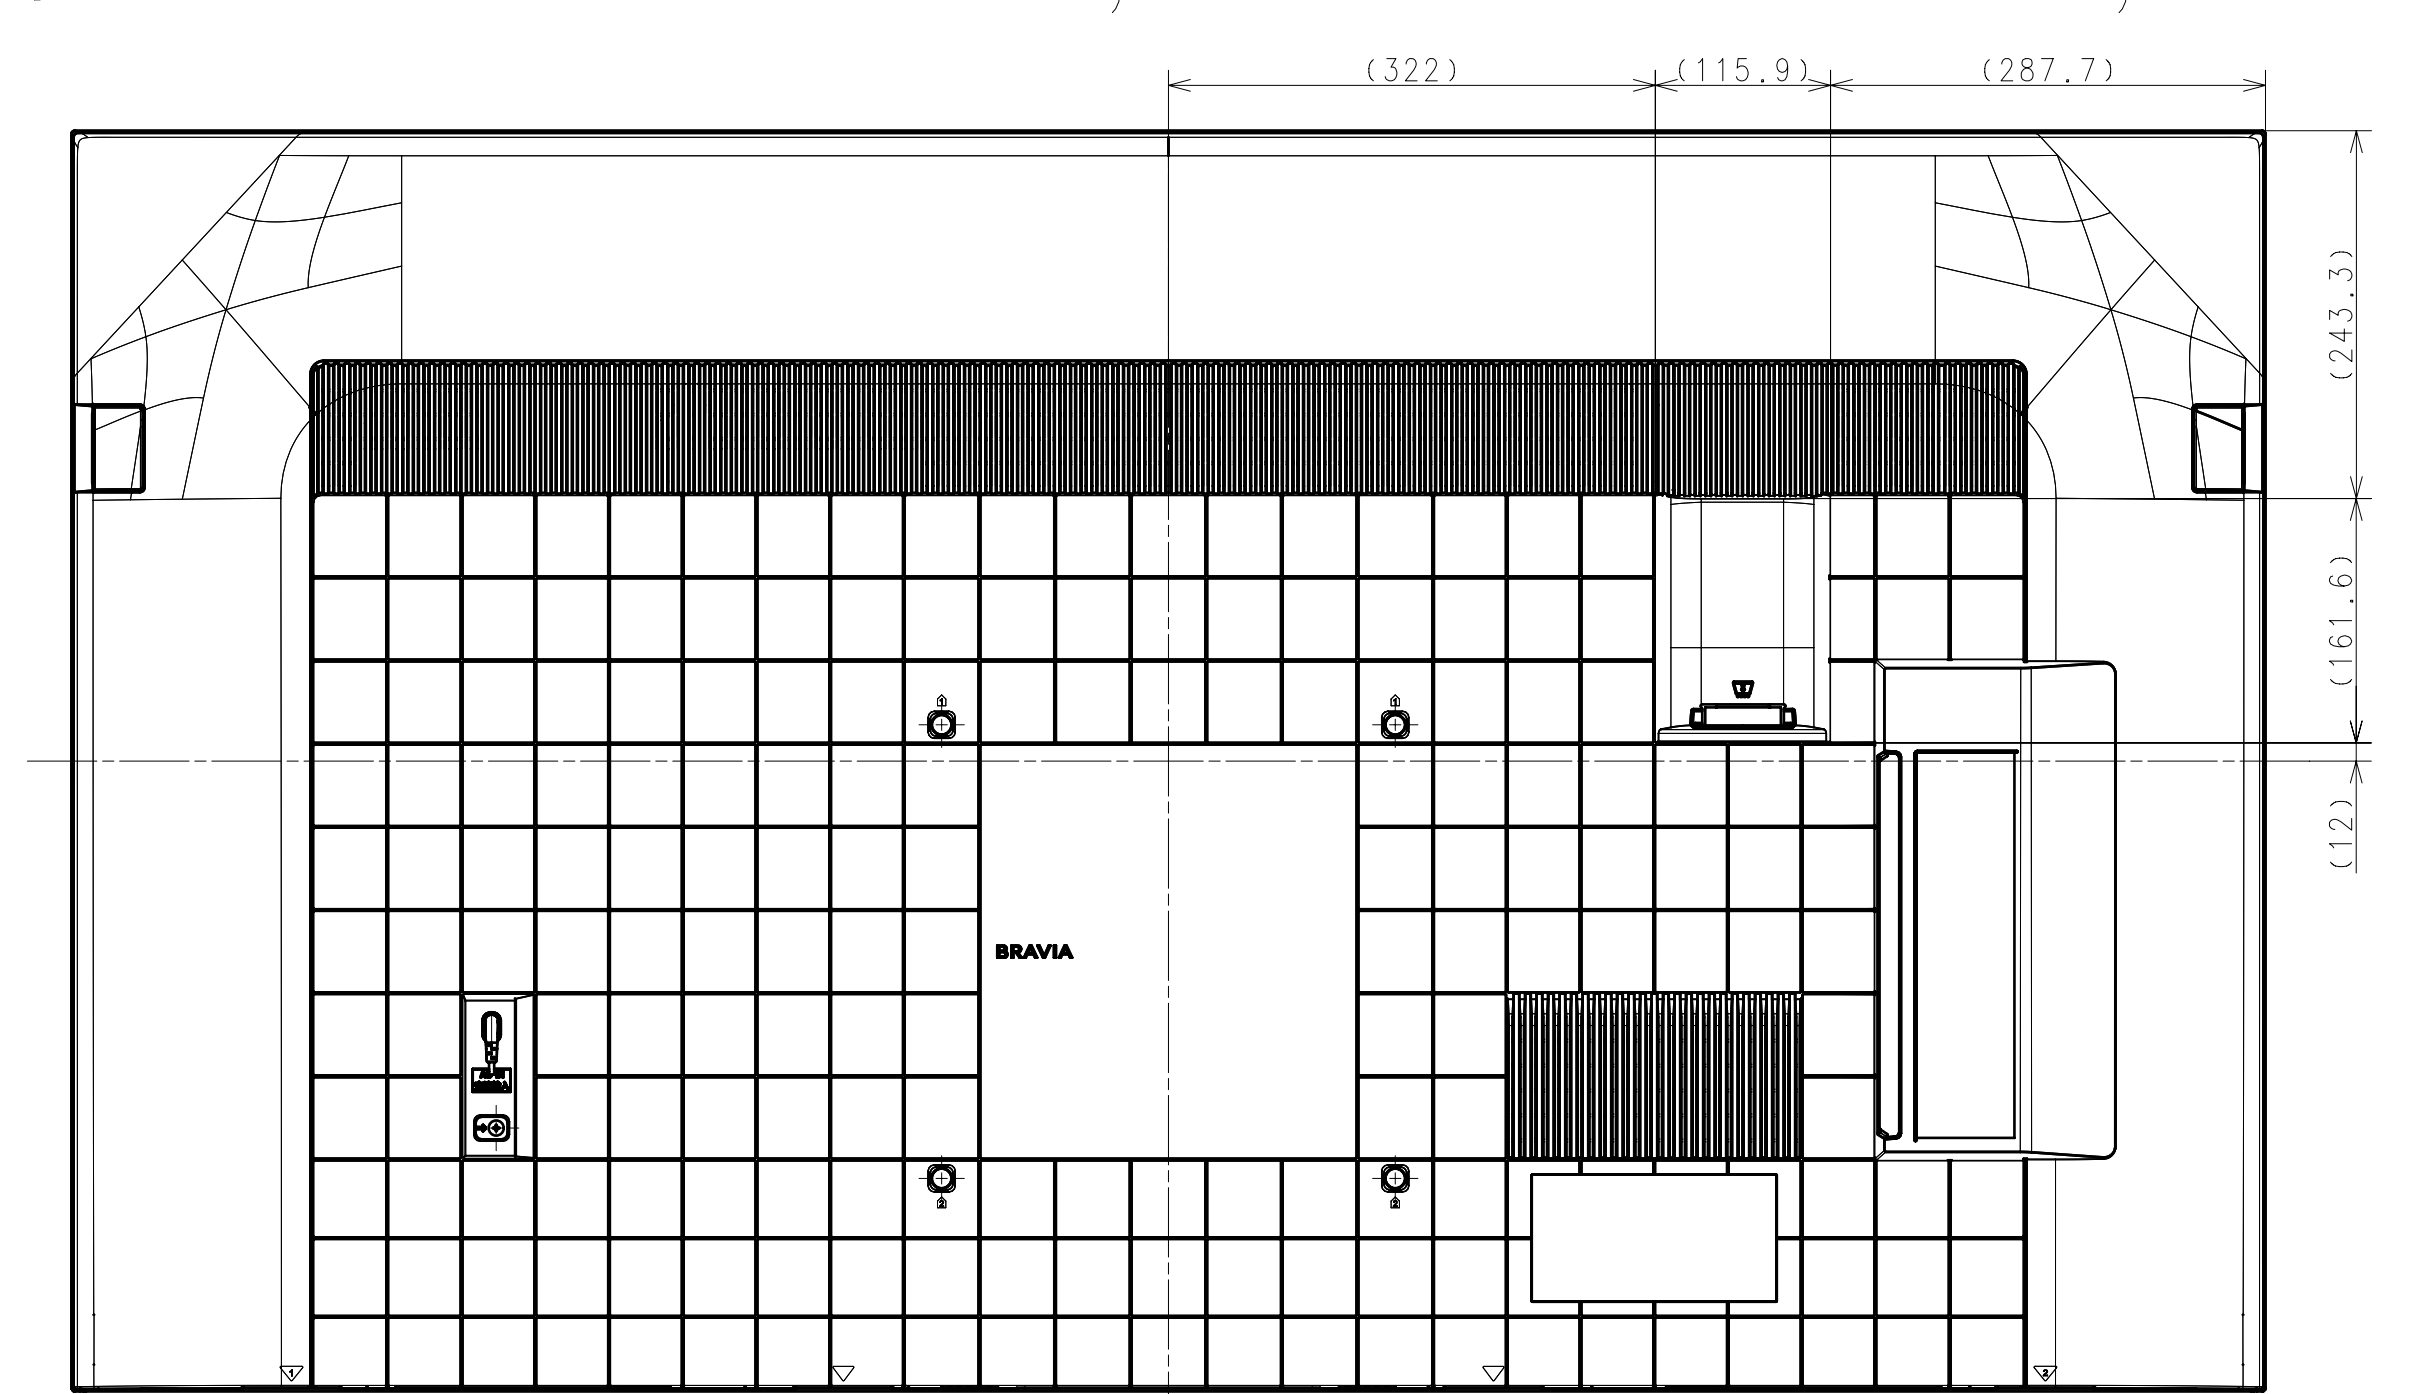


For. EUROPE

SU-WL450

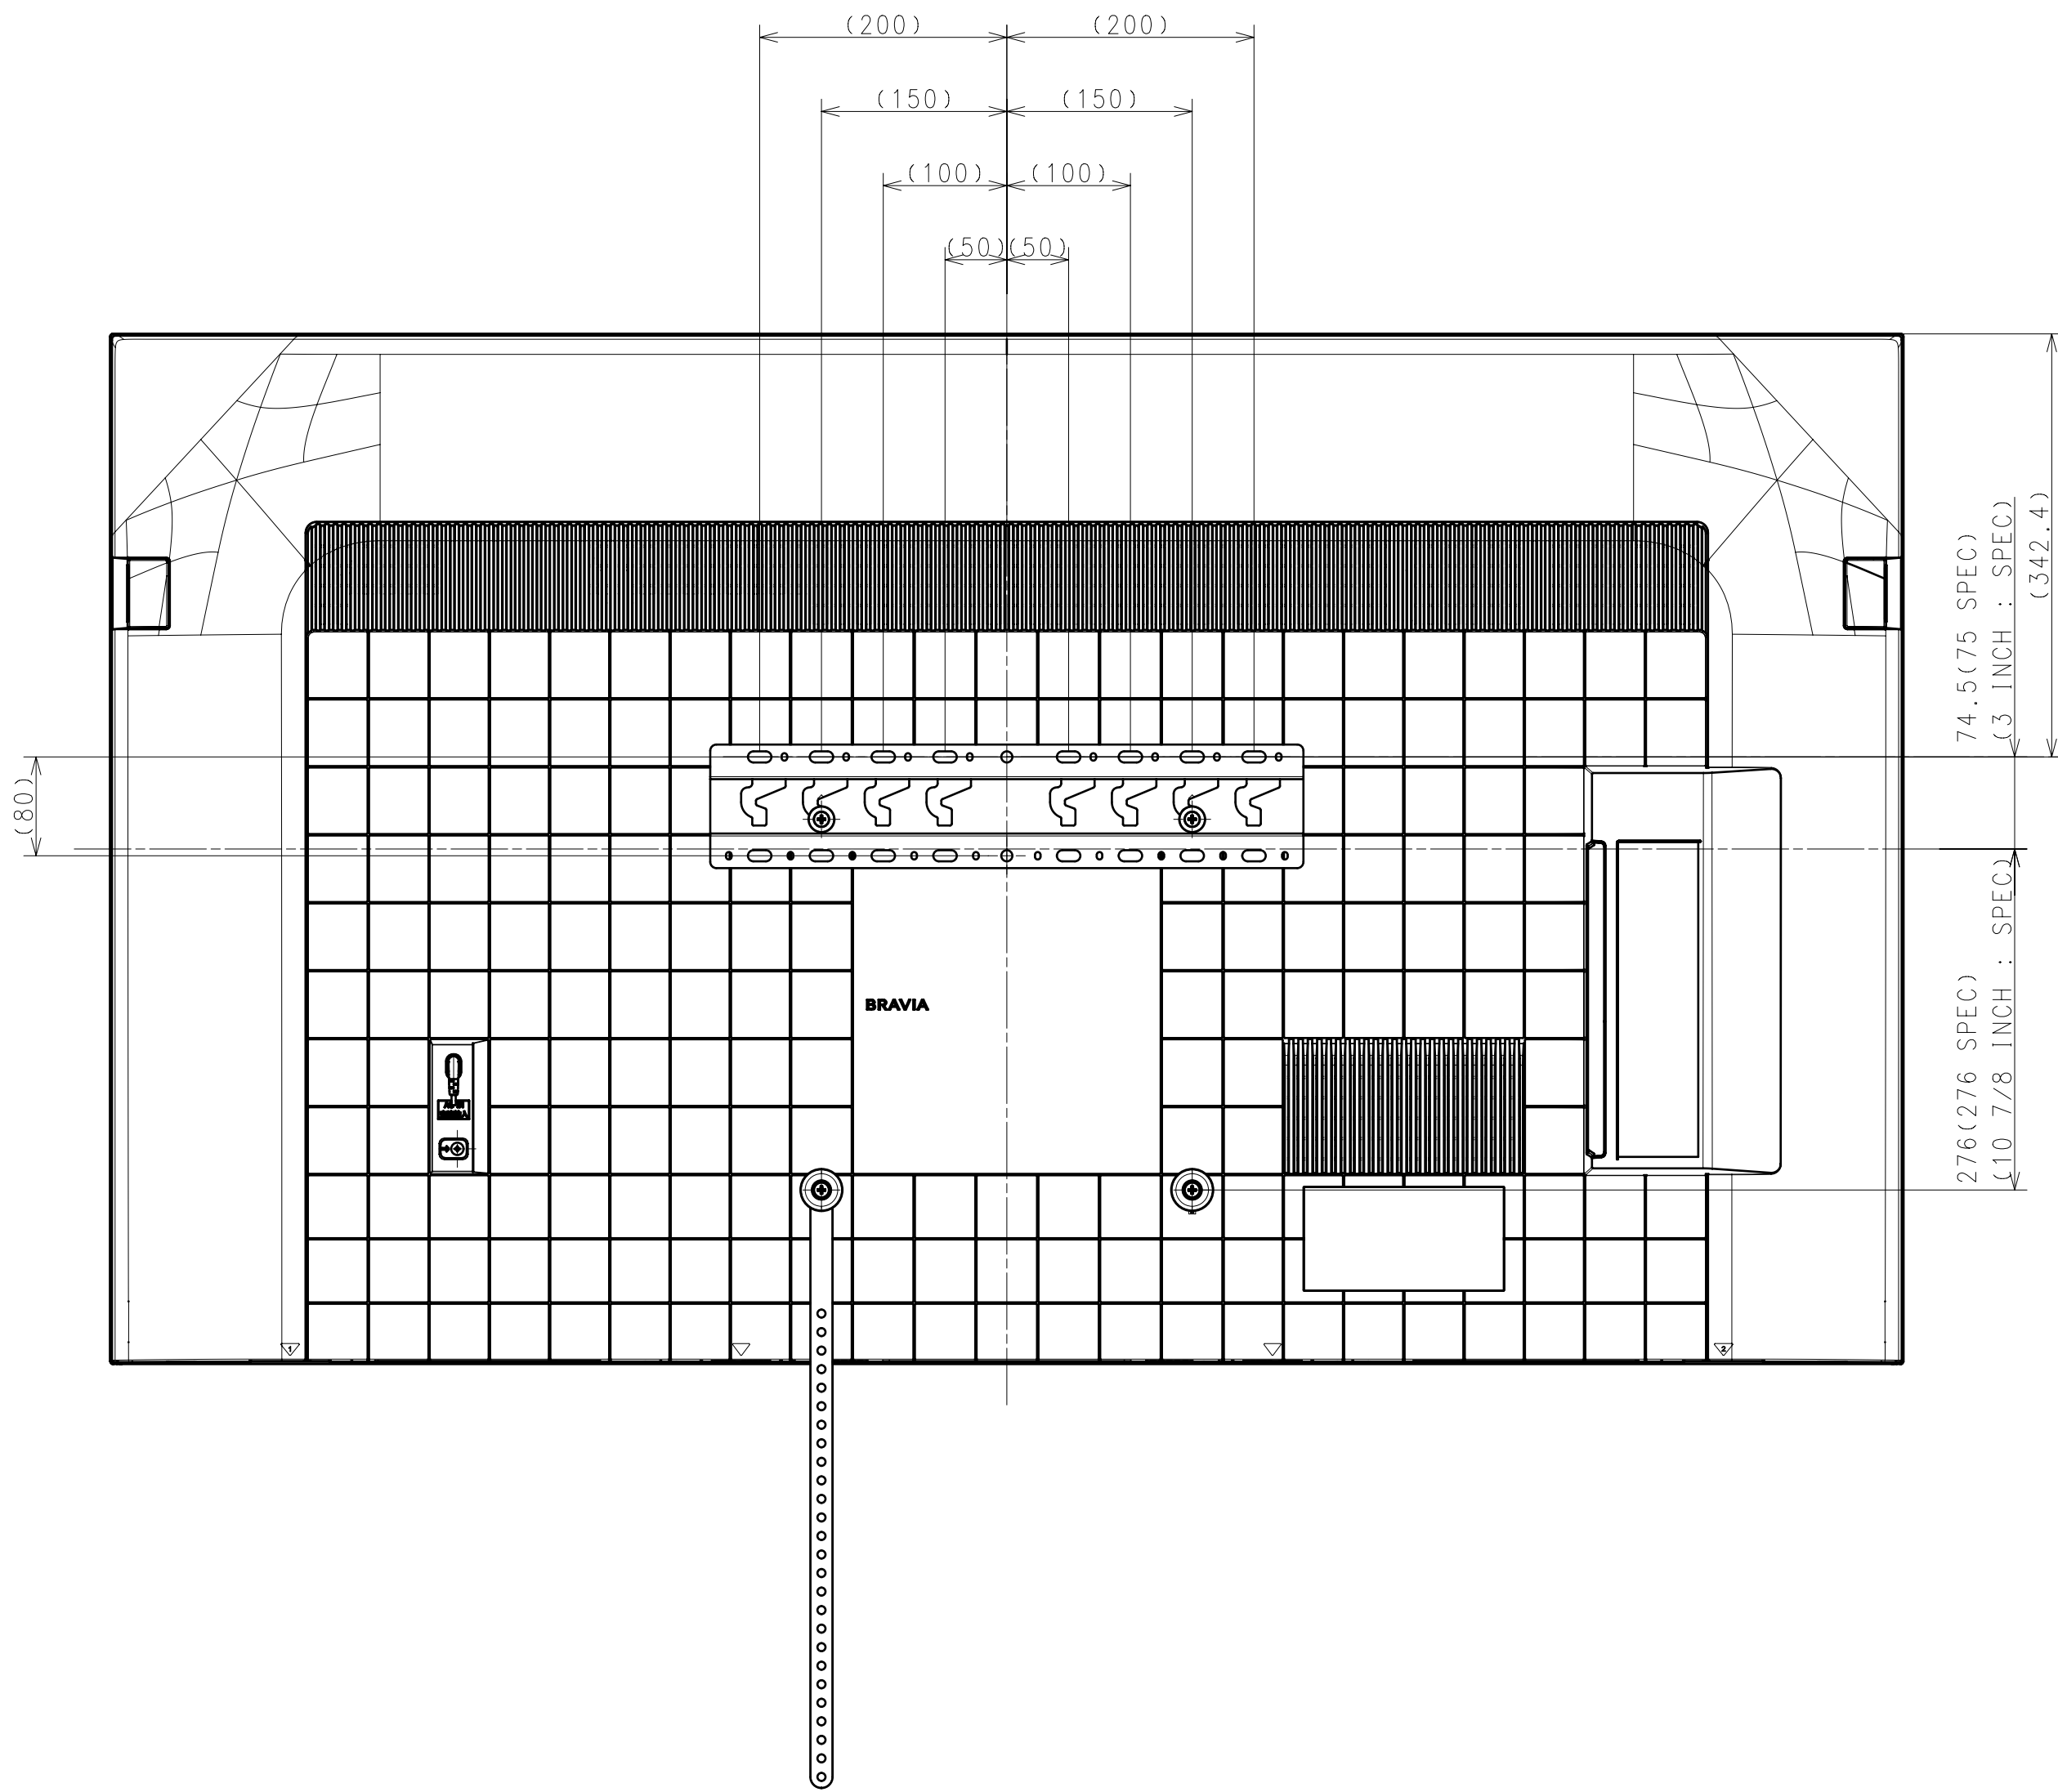


STANDARD

132.3 (133 SPEC) Δ
(5 1/4 INCH : SPEC)

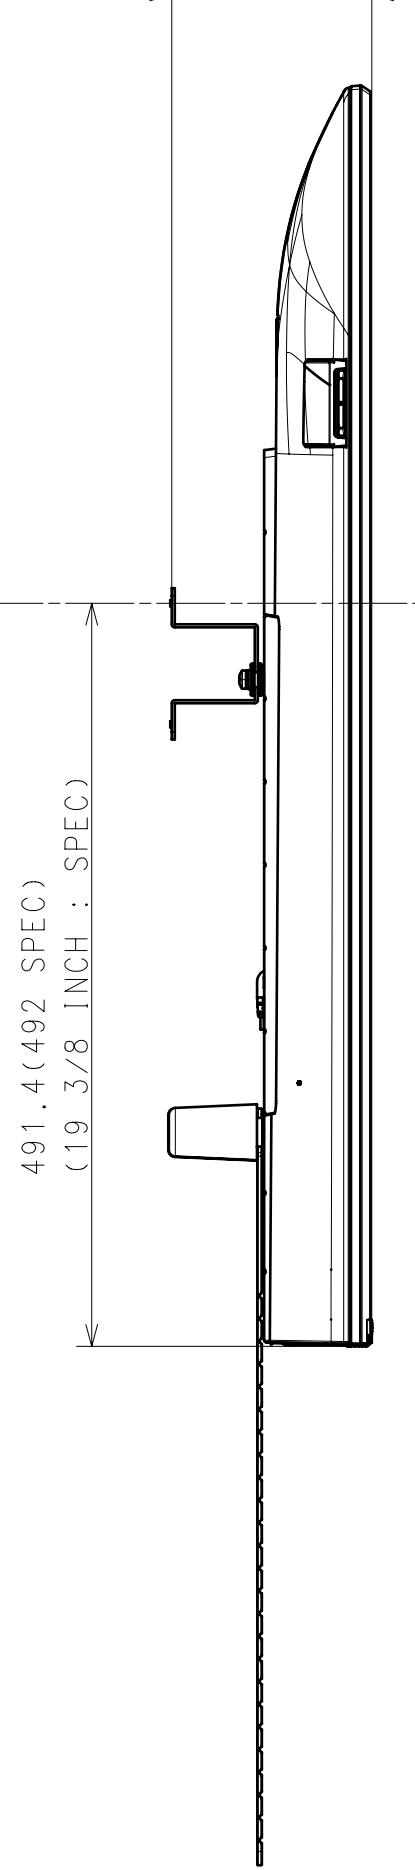

SLIM

92.5 (93 SPEC) Δ
(3 3/4 INCH : SPEC)

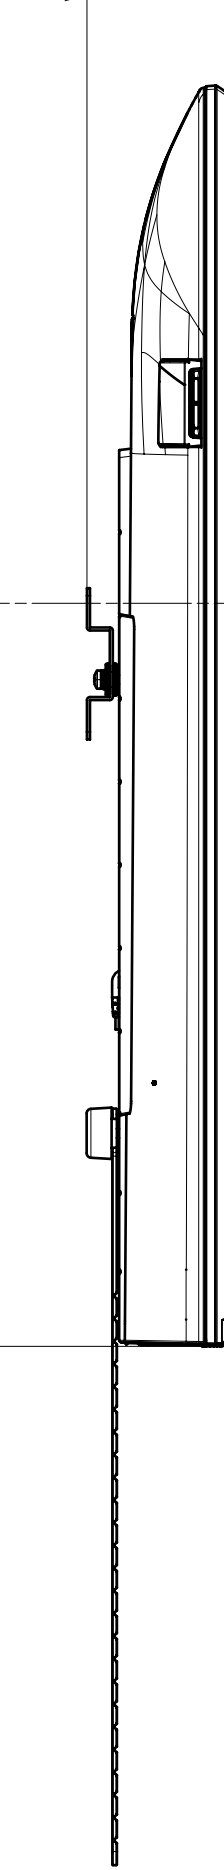

SU-WL850

SU-WL855 WITH LATERAL SHAFT BRACKET

